

# CERTIFIED LAND CORNER RECORDATION

(REFERENCE FSM 7153.53)

## DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

24" Hemlock N. 48° E. 49 Lks. ( No evidence )  
 16" Cedar S. 11° E. 12 Lks. ( Found )  
 10" Hemlock S. 50° W. 10 Lks. ( Found )  
 20" Hemlock N. 31° W. 36 Lks. ( Found )

Stone found

## DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: 7/29/80

Set standard aluminum post & cap 24" in the ground

New Bts;

6" Cedar N. 19° W. 27.3 feet Mkd. T 30 N., R 34 W S 27 BT  
 8" Tam. N. 36° E. 22.8 feet Mkd. T 30 N R 34 W S 26 BT  
 8" Doug. Fir S. 37° W. 23.4 feet Mkd. T 30 N R 34 W S 34 BT  
 6" Hemlock S. 30° E. 23.4 feet Mkd. T 30 N R 34 W S 35 BT


Bearing tree tags affixed

Brass tags # 2968 S set at base of BTs at root crown distance from corner.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.  
 (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

See Survey Plat, South Fork Keeler, T. 30 N., R. 34 W., P.M.

Surveyor's Seal

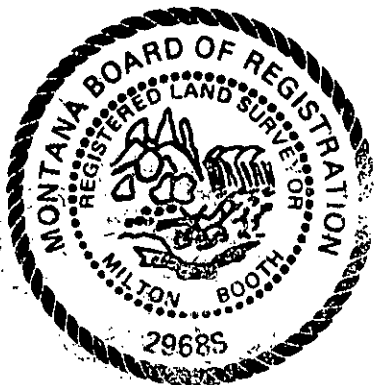

I, \_\_\_\_\_  
 certify that the information shown herein is true and correct.

Signature of Ground Party Chief

Milton I. Booth


I, \_\_\_\_\_  
 certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

*Milton I. Booth*  
 Signature of Surveyor

2968 S

Registration Number

DIAGRAM OF CORNER:

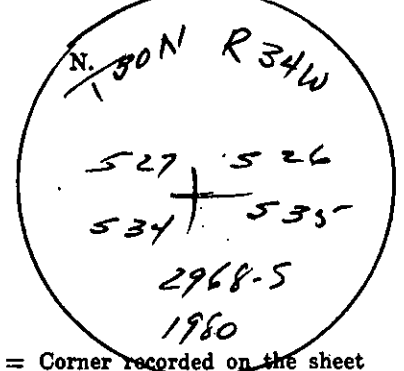

= Corner recorded on the sheet

Office of Clerk and Recorder, County of *Lance*

This "corner record" was filed for record on the *1st* day of *September* 19*81*, was noted on the cross-index plat and is assigned page No. *1202*, in book No. *1*

*Clarence L. Thompson, Jr. Deputy*  
 County Official

Cross Index No. *V-17* T. *30 N* R. *34 W* P. *Mer.*