

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

 Corner 13 | 18
24 | 19

T. 30N R34W & 33W P.M.M. Lincoln County

- I 1893 GLO Record: Set a slate stone 12X8X6, 8ins. in the ground for cors. of secs. 13,18,19 and 24, mkd. with 3 notches on N. and S. edges.


from which:

A pine, 6ins. diam., bears N.17½°E., 77 lks. dist., mkd. T30N R34W S18 BT
 A pine, 6ins. diam., bears S.34½°E., 62 lks. dist., mkd. T30N R34W S19 BT
 A tamarack, 8ins. diam., bears S.28°40'W., 67 lks. dist., mkd. T30N R34W S24 BT.
 A tamarack, 20ins. diam., bears N.31°45'W., 42 lks. dist., mkd. T30N R34W S13 BT.

1967 BLM Remonumentation: The cor. of secs. 13,18,19 and 24, on the W. bdy. of the Tp., monumented with a slate stone, 12X18X6 ins., firmly set, marked with 3 grooves on the N. and 3 grooves on the S. faces., and witnessed by the remains of the original bearing trees.

At the corner point

set an iron post, 30 ins. long, 2½ ins. diam., 24ins. in the ground with brass cap marked.



from which:



The original bearing trees:

A larch stump, 8 ins. diam., bears S.28°40'W., 67 lks. dist., with no visible marks. (record).
 A larch stump, 20 ins. diam., bears N.31°45'W., 42 lks. dist., marked T30N R34W S13 BT. (record)

The new bearing trees:

A fir, 8 ins. diam., bears N.56½°E., 16 lks. dist., mkd. T30N R34W S18 BT.
 A fir, 8 ins. diam., bears S.29½°E., 54 lks. dist., mkd. T30N R34W S19 BT.

(OVER)

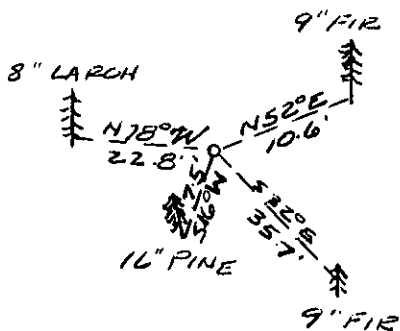

CERTIFICATION

I, Ronald Pearson
 certify the information shown herein is true and correct.

Ronald A. Pearson
 Signature Ground Party Chief

I, Thomas C. Hill
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Thomas C. Hill
 Signature of Surveyor & Seal

Date: 6/14/84 Reg. No. 5612S


Employer: U.S.F.S.

SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on July 12, 1984 was noted on the cross-index plat and is assigned page No. 2674, in book No. _____

Janet B. Sigel by Thomas C. Hill
 County Official Deputy

Sec. 24



• corner this sheet

 Cross Index No. _____ T. 30N R. 34W PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

A pine, 12 ins. diam., bears S.19½°W., 11 lks. dist., mkd. T30N R34W S24
BT.

A larch, 7 ins. diam., bears N.75½°W., 34 lks. dist., mkd. T30N R34W S13
BT.

Bury the original stone alongside and raise a collar of stone, 3 ft.
diam., around the iron post.

II. I found a BLM brass cap, mkd. as shown above, 6 ins. above ground,

from which:

A fir, 9ins. diam., bears N.52°E., 10.6 ft., scribing visible.

A fir, 9ins. diam., bears S.32°E., 35.7 ft., healed face.

A pine, 16ins. diam., bears S.16°W., 7.5 ft., healed face.

A larch, 8ins diam., bears N78°W., 22.8 ft., healed face.

III. Set a 6 ft. galvanized post 1½ in the ground 1.5 ft. NW of corner, placed
rock around corner and painted all BT's with a 6" red band. Posted two
new BT's signs.