

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Cor. 1 HES 581 & W. 1/4 S 24 T. 30N R. 34W P.M.M. Lincoln County

- I. 1903 GLO Record: Set a granite stone, 12x12x5 ins., 8 ins. in ground, for 1/4 sec. cor., mkd. 1/4 on W. face; from which:

A fir, 8 ins. diam., bears N.82°E., 13 lks. dist.; mkd. 1/4 S 24 B.T.

A fir, 8 ins. diam., bears N.35°W., 11 lks. dist., mkd. 1/4 S 23 B.T.

1913 GLO Retracement survey: Falls 12 lks. W. of 1/4 sec. cor. which is a granite stone, 5x12x4 ins. above ground, properly marked; as old bearing trees have been killed by fire, I take new trees as follows,

A Tamarack, 18 ins. diam., bears S.44°E., 103 lks. dist. mkd. 1/4 S24 B.T.

A fir, 8 ins. diam., bears S.32°W. 81 lks. dist., mkd. 1/4 S23 B.T.

This corner will hereafter refer to sec. 24 only.

U.S.D.A. 1917 H.E.S. No. 581 cor 1 survey: Beginning at point for list cor. 1 identical with the 1/4 sec. cor. on W. boundary of sec. 24, a granite stone, firmly set, 6x12x5 ins. above ground, heretofore described. I adopt this cor. for cor. No. 1 of this survey, mark it with a cross (x) on top for the exact cor. point and at a point 1 lk. sw thereof set a stake 24x2x2 ins. 12 ins. in the ground, mkd. 1 H E S 581 on West face, from the cross (x) on corner;


A cross (x) on a fir tree 9 ins. dia. bears S 5°15'W., 59 links dist. (new BT)

A cross (x) on a yellow pine tree 9 ins. diam., bears S.31°00'E., 71 lks. dist. (new BT): each blazed and scribed 1 H E S 581 B.T.


BLM Remonumentation: The 1/4 sec. cor. of sec. 24 identical with cor. No. 1 of H E S Survey No. 581, monumented with a granite stone 12x12x4 ins., firmly set, marked 1/4 on W. face and witnessed by the remains of the original bearing trees.

at the corner point:


set an iron post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown.



(OVER)

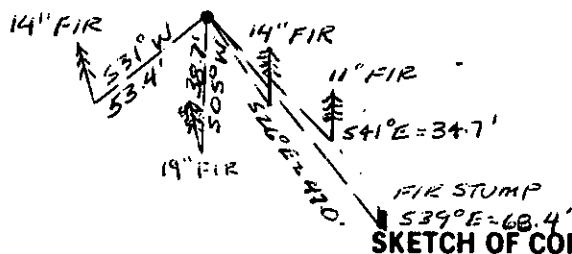

SKETCH OF CORNER



CERTIFICATION

I, Ronald Pearson

certify the information shown herein is true and correct.

Ronald D. Pearson
Signature Ground Party Chief

I, Thomas C. Hill

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Thomas C. Hill
Signature of Surveyor & Seal

Date 6/14/84 Reg. No. 5612S

Employer: U.S.F.S.

Office of Clerk and Recorder, County of Lincoln. This "corner


record" was filed for record on July 12, 1984

was noted on the cross-index plat and is assigned page No. 2678, in

book No. _____

Janet B. F. Sigal by Joann R. Rennie
County Official Deputy

Sec. 24



• corner this sheet

Cross Index No. _____ T. 30N R. 34W P.M.M.

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

The original bearing trees:

A stump 16 ins. diam., bears S.44°E., 103 lks. dist., marked $\frac{1}{4}$ S24 B.T. (Record)

A fir, 12 ins. diam., bears S.32°W., 81 lks. dist., marked $\frac{1}{4}$ S23 BT. (Record).

A pine, 11 ins. diam., bears S.31°E., 71 lks. dist., marked 1 HES 581 BT. (Record).

A fir, 17 ins. diam., bears S.5 $\frac{1}{4}$ °W., 59 lks. dist., marked 1 HES 581 BT. (Record).

The new bearing tree:

A fir, 7 ins. diam., bears S.46°E. 52 lks. dist., marked $\frac{1}{4}$ S 24 BT.

bury the original stone alongside the iron post.

II. I found a BLM brass cap, on an iron pipe 2 ins. above ground, from which:

A fir stump 19 diam., bears S.39°E., 68.4 ft. dist., scribing visible.

A fir, 11 ins. diam., bears S.41°E., 34.7 ft. dist., healed face.

A fir, 14 ins. diam., bears S.31°W., 53.4 ft. dist., visible scribing.

A fir, 19 ins. diam., bears S.05°W., 38.7 ft. dist., visible scribing.

A fir, 14 ins. diam., bears S.26°E., 47.0 ft. dist., visible scribing.

III. I painted all BT's with red bands and attach attention signs on the back of sec. BT's and attached BT signs to the HES BT's.

I posted a location poster on the north side of North Keeler Rd. #404, corner bears north 177 ft.

I set a 6 ft. galvanized post 1 ft. into the ground with survey marker decal, 1.5 ft. east of corner.