

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Cor. 5 HES 577 T. 30N R. 34W P.M.M. Lincoln County

I. 1917 GLO Record: set a small stone, mkd. with a cross(x), under a quartzite stone 26x10x6, 16ins. in the ground, mkd. 5 HES 577 on SW face and a cross(x) on top for the exact corner point.

from which:

- A cross(x) on a larch, 15in. diam., bears N.80 $\frac{1}{2}$ °E., 187 lks. dist.
- A cross(x) on a larch, 24in. diam., bears S.21 $\frac{1}{4}$ °E. 73 lks. dist.
- Each blazed and scribed 5 HES 577 BT.
- Raise a mound of earth 4 ft. base and 2 ft. high, SW of corner.

II. Found a stone 26x10x6in., 10ins. exposed with 5 HES 577 on SW face.

from which:



- A larch, 19in. diam., bears S.18°E., 123 ft. dist. visible scribing. (Record S.21 $\frac{1}{4}$ °E. 73 lks.) tree is down and dead.
- A larch, 27in. diam., bears N.80°E., 50 ft., visible scribing. (Record N.80°E., 187 lks dist.) Tree is down and dead.

Note: Original notes have reversed distant calls.

III. I set a 3/4in. diam. by 30in. long aluminum rod with a 3/4in. diam. aluminum cap 6ins. exposed surrounded by a stone collar and mkd. as shown. Bury the original corner alongside pipe.

from which the new BT's:

- A fir, 7in. diam., bears S.36°E., 27.5 ft. dist., scribed 5 HES 577 BT.
- A fir, 14in. diam., bears N.65°E., 24.5 ft. dist., scribed 5 HES 577 BT.
- Painted red bands around all BT's and attached BT signs. Set a 6 ft. galvanized post 2 ft. in the ground 2 ft. N. of corner.

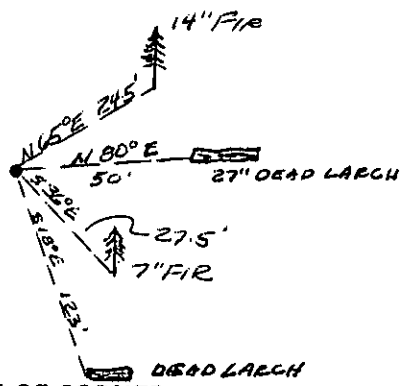

SKETCH OF CORNER

CERTIFICATION

I, James W. Reed
certify the information shown herein is true and correct.

James W. Reed
Signature Ground Party Chief

I, Thomas C. Hill
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Thomas C. Hill
Signature of Surveyor & Seal

Date: 6/21/84 Reg. No. 5612S

Employer: U.S.F.S.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on July 12, 1984 was noted on the cross-index plat and is assigned page No. 2685, in book No. _____

Janet B. Siegel by Jeanne Dennis
County Official Deputy

Sec 14

• corner this sheet