

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 Cor. of Sec. 12 only T. 30 N. R. 34 W. P.M.M. Lincoln County

I. 1893 original, G.L.O. record by Daniel P. Mumbrue: "Set a post 3 ft. long, 3 ins. square,

24 ins. in the ground for 1/4 sec. cor., marked 1/4 S on W. face, from which

A fir, 18 ins. diam., bears N2° E, 72 lks. dist., marked 1/4 S BT.

A fir, 18 ins. diam., bears N30 1/4° W, 16 lks. dist., marked 1/4 S BT."

1913 resurvey, G.L.O. record by Lewellyn D. Lyman et al: at N0° 2' E, 40.00 chains on E. bdy.

of sec. 12, "Set a limestone, 14x12x5 ins. 9 ins. in the ground, for 1/4 sec. cor. of sec. 12 only, marked 1/4 on W. face, from which

A tamarack, 16 ins. diam., bears N47° W, 23 lks. dist., marked 1/4 S12 BT.

A tamarack, 10 ins. diam., bears S42 1/4° W, 16 lks. dist., marked 1/4 S12 BT."


at N0° 2' E, 41.12 chains on E. bdy. of sec. 12, "The old 1/4 sec. cor. post is in poor condition, therefore I Set a limestone, 18x13x10 ins. 12 ins. in the ground for 1/4 sec. cor. of sec. 7 only, marked 1/4 on N. face, the cor. is witnessed as described by the surveyor general."

II. Found a set 16x8 ins. stone, 5 ins. out of ground, marked 1/4 on W. face, from which

A grand fir, 16 ins. diam., bears S34° E, 15.8 ft. (24 lks.) dist., mkd. E 1/4 S13 BT.
(origin unknown)

A douglas fir, 6 ins. diam., bears N23° W, 13.5 ft. (20 lks.) dist., mkd. X BT.
(origin unknown)

III. In place of stone monument, set a 2 1/2 ins. diam. aluminum pipe, 30 ins. long, 26 ins. in the ground with attached 3 1/4 ins. diam. U.S.D.A. Forest Service aluminum cap, marked as shown:



Raise a collar of stone around pipe.

Establish one new bearing tree:

A douglas fir, 24 ins. dia., bears N57° W, 25.8 ft. dist., mkd. 1/4 S12 BT.

Set a 6 ft. galvanized steel guard post with "Survey Marker" decal attached, 3 ft. North.

Painted a red band around each bearing tree and attached "Land Survey Monument" & "Bearing Tree" signs where needed.

Magnetic Declination: East, 20°

CERTIFICATION

I, Tom Hommel

certify the information shown herein is true and correct.

Tom M. Hommel
Signature Ground Party Chief

I, Alvah F. Hughes


certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes
Signature of Surveyor & Seal

Date: 11/12/91

Reg. No. 7322

Employer: U.S. FOREST SERVICE

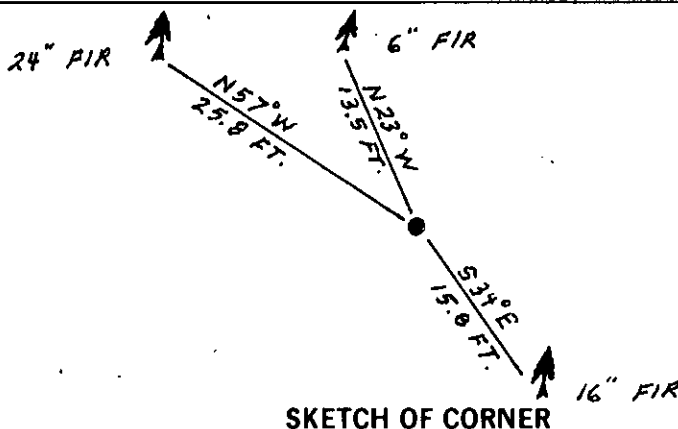


SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 4-22-92 was noted on the cross-index plat and is assigned page No. 5050, in book No. -

County Official [Signature]

G25 30 N 34 W
Cross Index No. T. R. PMM

Sec. 12



• - corner this sheet