INSTRUCTIONS

- 1. Original and/or subsequent record used to evaluate the corner position.
- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- corners.

 3. Description of monument and accessories set to perpetuate the corner position.
- 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
- 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

1/4 Cor. of Secs. 11 & 12 Corner_ P.M.M. County

- 1913 original G.L.O. record by Lewellyn D. Lyman et al: "Set a limestone, 14x8x6 ins., 10 ins. in the ground, for 1/4 sec. cor., marked 1/4 on W. face; and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor."
- II. Corner and accessories not found, as corner falls in steep unstable talus slope.
- III. At the determined corner position by survey, set a 2 1/2 ins. diam. aluminum pipe, 30 ins. long, 26 ins. in the ground with attached 3 1/4 ins. diam. U.S.D.A. Forest Service aluminum cap, marked as shown:




Establish two new bearing trees:

- A douglas fir, 11 ins. diam., bears N81 $^{\circ}$ E, 20.3 ft. dist., mkd. 1/4 S12 BT. A douglas fir, 7 ins. diam., bears N37 $^{\circ}$ W, 16.1 ft. dist., mkd. 1/4 S11 BT.

Painted a red band around each bearing tree and attached "Land Survey Monument" & "Bearing Tree" signs. No guard post set.

Magnetic Declination: East, 20

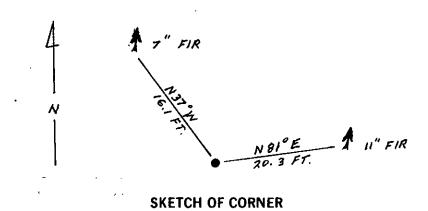

certify that this Corner Record correctly represents work per form 11/1<u>3/91</u> Reg. No. 7322 LS U.S. FOREST SERVICE Employer:

This "corner

Office of Clerk and Recorder, County of record" was filed for record or was noted on the cross-index plat and is assigned page No. book No. -County Official / 30 N

Cross Index No. -

ue and correct.

CERTIFICATION

Sec.

corner this sheet