

- INSTRUCTIONS
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner C 1/4 Section 26 T. 30 N. R. 34 W. P.M.M. Lincoln County

I. DAVIS SURVEYING, INC. 1992

I set a 5/8 inch dia. x 24 inch long rebar with 1 1/4 inch dia. plastic cap stamped: KED 4975 S

FROM WHICH:


A 28 inch dia. Spruce BT bears N 89° E 32.00 feet from the center of the tree, scribed: C 1/4 S 26 BT
A 27 inch dia. Spruce Bears S 8° W 49.50 feet from the center of the tree, scribed: C 1/4 S 26 BT

MAINTENANCE:

Placed BT signs.

Painted the blazes red.

Painted a 6 inch red band around the tree above the BT sign.

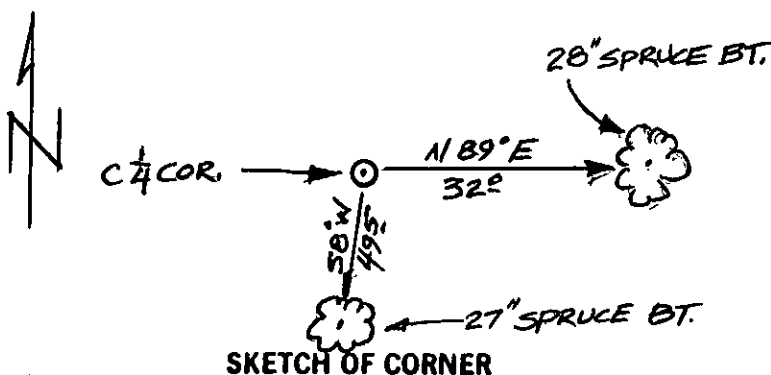

CERTIFICATION


1. John Damon
certify the information shown herein is true and correct.
John Damon
Signature Ground Party Chief

1. Kenneth Davis
certify that the work shown herein directly represents work performed by me or under my supervision in compliance with the "Corner Recordation Act" (70-22-101 et seq. M.C.A.)
Kenneth Davis
Signature of Surveyor & Seal
Date: 10/12/92 Reg. No. 4975 S
Employed by Davis Surveying, Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on OCT 14, 1992 was noted on the cross-index plat and is assigned page No. 5085, in book No. Corral M. Cummings by Bill Brashoff County Official

Cross Index No. _____ T. _____ R. _____ PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors



• - corner this sheet