CERTIFIED CORNER RECORDATION

								22.00		
Corner	Sec Cor	Sec	1 6 31	Т	20N	D	33W	P.M., MT	Lincoln	County
COLUCI	Sec. Cui.	Sec.	1, 0, 51,	1.	2714	17.	33 11	T -14H-9 14H H	Lincom	County
			0-26		30N		34W			
			& 36		JUIN		34 W			

1893 original survey of the Lake Creek Guide Meridian by Daniel P. Mumbrue: Set a shale stone, 14 x I. 12 x 4 ins., 10 ins. in the ground, mkd. with 6 notches on each edge, from which,

A fir, 20 ins. diam., bears N30°E, 7 lks. dist., scribed "T30N R33W S31 BT".

A fir, 12 ins. diam., bears S40°E, 50 lks. dist., scribed "T29N R33W S6 BT".

A fir, 24 ins. diam., bears N51°55'W, 155 lks. dist., scribed "T30N R34W S36 BT".

A pit in S1, 6 ft. dist.


A mound of earth, 2 1/2 ft. high, 5 ft. base, alongside corner stone.

1984 Certified Corner Recordation by Thomas C. Hill, 5612S, USFS: Found a set stone with 6 notches on N. and 6 notches on S. edges, from which the remains of the original bearing trees,

Rotten remains, bears S40°E, 50 lks. dist., with visible axe marks.

A rotten stump, 3 ft. high, bears N51°55'W, 155 lks. dist., with visible scribing.

At the corner point, set a 2 1/2 ins. diam., 30 ins. long, alum. pipe, 24 ins. in the ground, with a 3 1/4 ins. diam. alum. cap, mkd. as shown:



Buried the original corner stone alongside pipe and set a 6 ft. galvanized steel post, North, 2 lks. dist. Established 4 new bearing trees.

Found a 2 1/2 ins. diam. alum. pipe, with a 3 1/4 ins. diam. alum. cap, 6 ins. above ground, mkd. as II. shown above, from which the 1984 USFS bearing trees,

A fir, 12 ins. diam., bears N44°E, 17.2 ft. (26 lks.) dist., with healed face. (Rec.)


A fir, 10 ins. diam., bears S45°E, 15.0 ft.. (23 lks.) dist., with visible scribing. (Rec.)

A larch, 14 ins. diam., bears S16°W, 43.0 ft. (65 lks.) dist., with healed face. (Rec.)

A fir, 17 ins. diam., bears N13°W, 5.3 ft. (8 lks.) dist., with visible scribing. (Rec.)

III. Due to the removal of the S31 bearing tree for survey control purposes, established 1 new bearing tree: A fir, 13 ins. diam., bears N59°E, 26.3 ft. dist., scribed "T30N R33W S31 BT". The S31 bearing tree was left as a 30 ins. high stump.

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs. Magnetic Declination: 20° East.

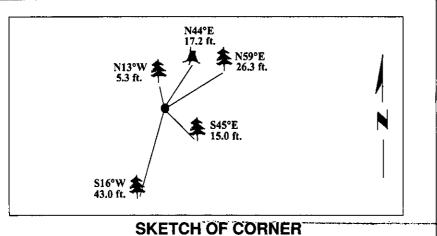

CERTIFICATION ı, Jeff Hintz certify the information shown herein is true and correct. Alvah F. Hughes Date: 1/2/97 Reg. No.: 7322LS Employer: U.S. FOREST SERVICE

INCOLN Office of Clerk and Recorder, County of This "corner record" was filed for FEB 3,1997 and was noted on the cross-index plat and is assigned page No. 9/97 record on M CHMMINGS in book No. County Official

Sec. 36 - corner this sheet

A-25

30N