CERTIFIED CORNER RECORDATION

Corner East 1/16 Cor. Sec 13 T. 31 N., R. 26 W. P.M.M. Lincoln County Sec 24

Record

A thorough search of the records of the Lincoln County Clerk and Recorder's Office yielded no record of this corner having been previously set in accordance with the BLM Manual of Surveying Instructions.

At the position for the East 1/16 corner of sections 13 and 24, an aluminum rod, 3/4 inch in diam. by 48 inches long, 44 inches in the ground, with a Forest Service aluminum cap, 3 1/4 inches in diam. marked as shown below.

From which:

<u>Set</u>

A spruce, 12" d.b.h., bears N. 88° W., 101.1 ft. distant, blazed and scribed "E1/16 S13 BT".


A spruce, 8" d.b.h., bears S. 9° W., 45.1 ft. distant, blazed and scribed "E1/16 S24 BT".

A spruce, 4" d.b.h., with a location poster attached bears N. 87 ° E., 8.85 ft. distant.

Measurements were made with a hand compass (declination 18° E.) and a steel tape to the center of the root crowns of all trees. Distances are horizontal.

We attach "BEARING TREE" and "LAND SURVEY MONUMENT" signs to the bearing trees.

National Forest boundary posts are placed 3 ft. south and 3 ft. west of the corner.

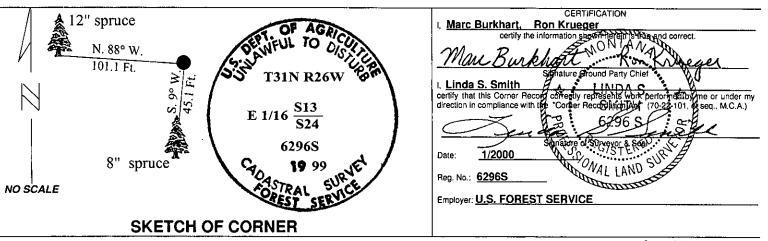

Office of Clerk and Recorder, County of Jucoln. This "corner record" was filed for record on 1-24-2000 was noted on the cross-index plat and is assigned page No.______, in book No. ______ 1040 7 Coral M. Cumming Ly OLB County Official



ross Index No. <u>N-24</u> T. <u>31N</u> R. <u>26W</u> PM