
## CERTIFIED CORNER RECORDATION


CORNER NW CORNER SEC. 26 T. 31N , R. 26W , P.M.M., LINCOLN COUNTY

RECORD: SET A SANDSTONE18x12x10 12" INTO THE GROUND WITH 2 NOTCHES ON SOUTH AND EAST FACES, FROM WHICH: RAISED A MOUND OF STONE 1 1/2' HIGH AND 2' WIDE AT THE BASE ALONGSIDE, NO BEARING TREES AVAILABLE.

FOUND: STONE 12x8x6 ABOVE GROUND WITH 2 NOTCHES ON SOUTH AND EAST FACES, FROM WHICH; 22" FIR WITH LOCATION TAG BEARS S56°E 9.20'.

MAINTENANCE: BUILT A MOUND OF STONE AROUND CORNER AND PAINTED IT RED. NEW BT 23" FIR BEARS S75°W 28.0'. SET 5 FOOT STEEL POSTS 3 FEET SOUTH AND 3 FEET EAST OF STONE. ATTACHED BT TAG AND PAINTED 6" BAND ON BT.

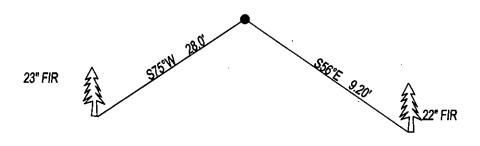

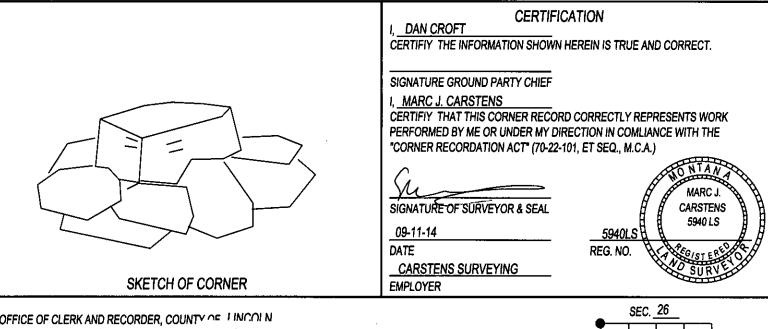

OFFICE OF CLERK AND RECORDER, COUNT	YOF LINCOLN	SEC. <u>26</u>
THIS "CORNER RECORD" WAS FILED FOR F WAS NOTED (	253502 BOOK: CCR CCER'S PAGE: 12129 Pages: 1 STATE OF MONTANA LINCOLN COUNTY	
	RECORDED: 09/22/2014 9:35 KOI: CCGR'S TAMMY D. LAUER CLERK AND RECORDER	
COUNTY OFFICIAL	FEE: \$0.00 BY: Start Start Spely FOR:CARSTEBS LAND SURVEYING P.O. BOX 1374, POLSON, MONTANA	
CROSS INDEX NO. <u>R-17</u> T. <u>31N</u>	, R. 26W , P.M.M.	
ADOPTED JULY 1, 1981, MONTANA BOARD O	F PROFESSIONAL ENGINEERS & LAND SURVEYORS	CORNER THIS SHEET