

CERTIFIED CORNER RECORDATION

CORNER C-W-NE 1/64 S 14 T. 31 N., R. 29 W., P.M.M. LINCOLN COUNTY

RECORD:
NONE

FOUND EVIDENCE:
NONE

PERPETUATION:


Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 20 inches long.
From which

A 4.5 inch DBH Douglas Fir scribed X BT. bears N 11° E 15.3 feet.

A 9.5 inch DBH Douglas Fir scribed T 31 N R 29 W C-W-NE 1/64 S 14 BT. bears S 40° W 35.4 feet.

Painted 6 inch wide bands and attached bearing tree signs to trees.

MAGNETIC DECLINATION: 18° E

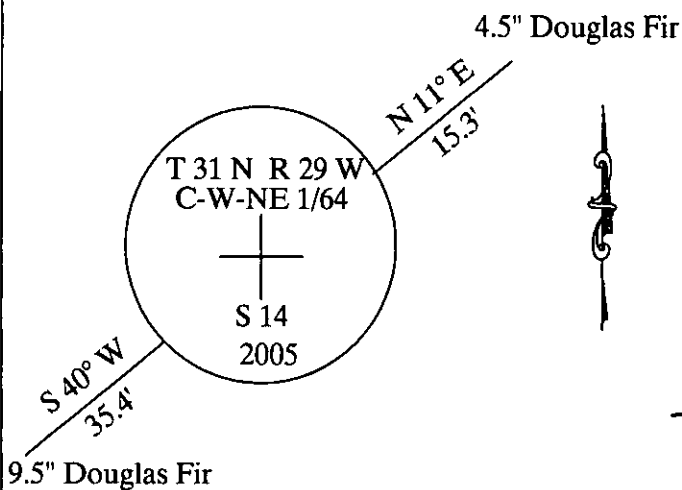

CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I, KENNETH E. DAVIS

certify that the above Record correctly represents work
done by me under my direction in compliance with the

Corner Recordation Act

70-2-201, M.C.A.

Signature of Surveyor

George Clark

Employer

Sungny Inc


4975-S

SKETCH OF CORNER

Office 185930 BOOK: CCR CC&R'S PAGE: 10800 Pages: 1
This "c" STATE OF MONTANA LINCOLN COUNTY
was re RECORDED: 07/13/2005 9:00 KOI: CC&R'S
No. CORAL M. CUMMINGS CLERK AND RECORDER
In boc FEE: \$0.00 BY: George Clark
TO: FILED

County Official

SECTION



Cross Index No. C-W-NE 1/64 S 14 T. 31 N., R. 29 W., P.M.M.

THIS CORNER