

# CERTIFIED CORNER RECORDATION

CORNER C-E-NE 1/64 S 14 T. 31 N., R. 29 W., P.M.M. LINCOLN COUNTY

RECORD:  
NONE

FOUND EVIDENCE:  
NONE

## PERPETUATION:


Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 20 inches long.  
From which

A 12 inch DBH Douglas Fir scribed T 31 N R 29 W C-E-NE 1/64 S 14 BT. bears S 68° W 20 feet.

A 16 inch DBH Douglas Fir scribed C-E-NE 1/64 S 14 BT. bears S 13° E 37.4 feet.

Painted 6 inch wide bands and attached bearing tree signs to trees.

MAGNETIC DECLINATION: 18° E

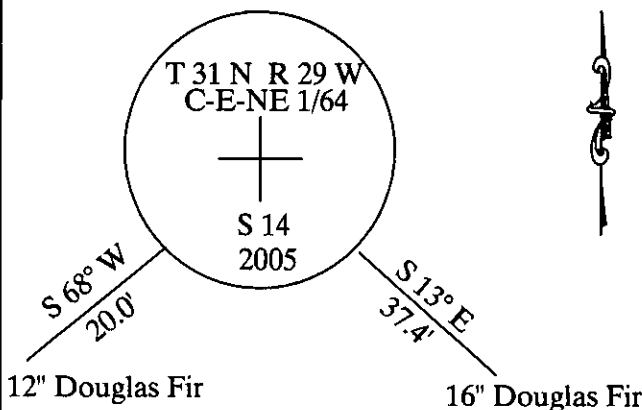

## CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I, KENNETH E. DAVIS


I, KENNETH E. DAVIS, Surveyor, certify that the above Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (Montana Code Annotated, § 82-101, et seq. M.C.A.)

Signature of Surveyor & Seal  
Kenneth E. Davis  
Surveyor No. 4975-S  
Employed by Surveyors Inc

## SKETCH OF CORNER

Office of Clerk and Recorder, County of \_\_\_\_\_  
This "corner record" was filed for record on \_\_\_\_\_  
was not 185932 BOOK: CCR CC&R'S PAGE: 10802 Pages: 1  
No. \_\_\_\_\_ STATE OF MONTANA LINCOLN COUNTY  
In book RECORDED: 07/13/2005 9:02 KOI: CC&R'S  
CORAL M. CUMMINGS CLERK AND RECORDER  
FEE: \$0.00 BY: Coral M. Cummings  
TO: FILED

## SECTION



Cross Index No. C-E-NE 1/64 S 14 T. 31 N., R. 29 W., P.M.M.

THIS CORNER