

CERTIFIED CORNER RECORDATION

CORNER E-E 1/64 S 14 T. 31 N., R. 29 W., P.M.M. LINCOLN COUNTY

RECORD:
NONE

FOUND EVIDENCE:
NONE

PERPETUATION:


Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 20 inches long.
From which

A 7 inch DBH Douglas Fir scribed X BT. S 14 bears S 10° W 17.4 feet.

A 13 inch DBH Tamarack scribed T 31N R 29 W E-E 1/64 S 11 bears N 42° E 17.4 feet.

Painted 6 inch wide bands with attached bearing tree signs to all trees.

MAGNETIC DECLINATION: 18° E

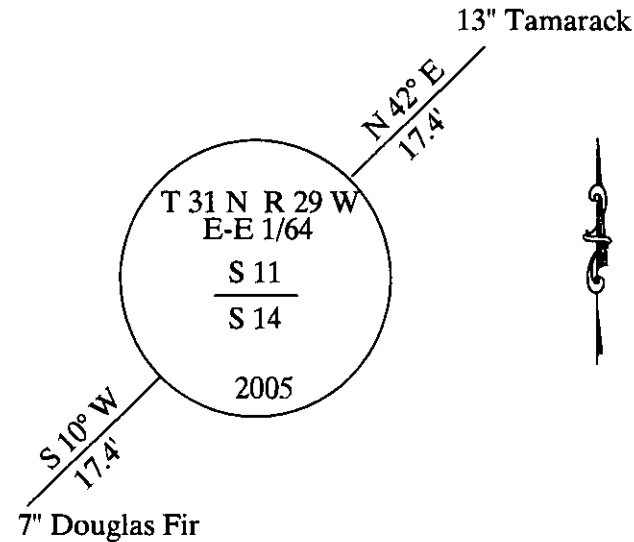

CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I, KENNETH E. DAVIS

certify that this Corner Record correctly represents work done by me or under my direction in compliance with the Montana Corner Record Act" (22-101, et seq., M.C.A.)

Signature of Surveyor & Seal

Date: 7/13/05 Reg. No. 4975-S

Sealing my INC

SKETCH OF CORNER

Office of Clerk and Recorder, County of _____

This "corner record" was filed for record on _____

was noted on tl _____ 185934 BOOK: CCR CC&R'S PAGE: 10804 Pages: 1

No. _____ STATE OF MONTANA LINCOLN COUNTY


In book No. _____ RECORDED: 07/13/2005 9:04 KOI: CC&R'S

CORAL M. CUMMINGS CLERK AND RECORDER

FEE: \$0.00 BY: Freddie Dennis

TO: FILED ,

SECTION



Cross Index No. E-E 1/64 S 14 T. 31 N., R. 29 W., P.M.M.

THIS CORNER