

# CERTIFIED CORNER RECORDATION

CORNER E-E 1/64 S 14 T. 31 N., R. 29 W., P.M.M. LINCOLN COUNTY

RECORD:  
NONE

FOUND EVIDENCE:  
NONE

## PERPETUATION:


Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 30 inches long.  
From which

A 7 inch DBH Douglas Fir scribed X BT. S 14 bears S 10° W 17.4 feet.

A 13 inch DBH Tamarack scribed T 31N R 29 W E-E 1/64 S 11 bears N 42° E 17.4 feet.

Painted 6 inch wide bands with attached bearing tree signs to all trees.

MAGNETIC DECLINATION: 18° E

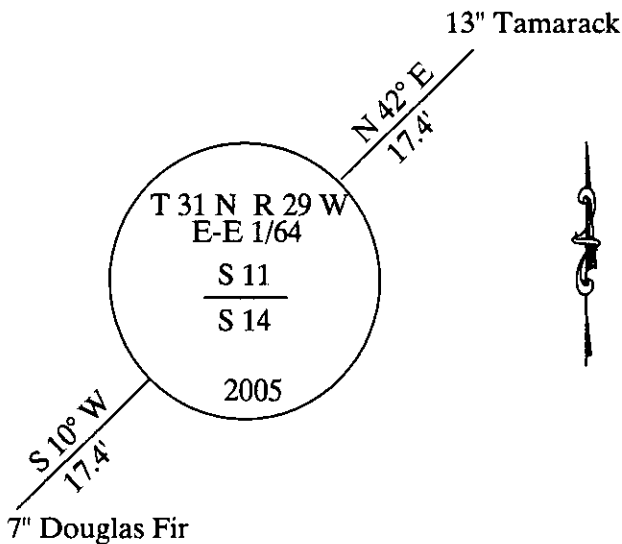

## CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I, KENNETH E. DAVIS

certify that this Certified Record correctly represents work performed by me or under my direction in compliance with the

Corner Recordation Act  
10-22-101, et seq., M.C.A.

Signature of Recorder Seal

Date: 07/13/2005 No. 4975-S

Employer: Davis Surveying & Co

## SKETCH OF CORNER

Office of Clerk and Recorder, County of \_\_\_\_\_

This "corner record" was filed for record on \_\_\_\_\_  
was not 185940 BOOK: CCR CC&R'S PAGE: 10810 Pages: 1

No. \_\_\_\_\_ STATE OF MONTANA LINCOLN COUNTY  
In book RECORDED: 07/13/2005 9:10 KOI: CC&R'S

CORAL M. CUMMINGS CLERK AND RECORDER


FEE: \$0.00

TO: FILED

BY: Glennie Senou

Cross Index No. E-E 1/64 S 14 T. 31 N., R. 29 W., P.M.M.

## SECTION



THIS CORNER