

CERTIFIED CORNER RECORDATION

CORNER E 1/4 S 14 T. 31 N., R. 29 W., P.M.M. LINCOLN COUNTY

RECORD:

Per GLO George A. Fessenden & Ranney Y. Lyman Contract No. 438 June 15, 1903

A stone in place 2 x 2 1/2 ft. above ground, for 1-4 sec cor I mark with a cross (x) at exact Cor point and 1/4 on W. side of cross; and raise a mound of stone, 2 ft. base 1 1/2 ft. high, W. of Cor. Pits impracticable.

FOUND EVIDENCE:

NONE

PERPETUATION:


Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 30 inches long. From which

A 10 inch DBH Douglas Fir scribed T 31 N R 29 W 1/4 S 14 BT. bears S 60° W 8.2 feet.

A 6 inch DBH Douglas Fir scribed 1/4 S 13 BT. bears S 69° E 13.4 feet.

Painted 6 inch wide bands and attached bearing tree signs to trees.

MAGNETIC DECLINATION: 18° E

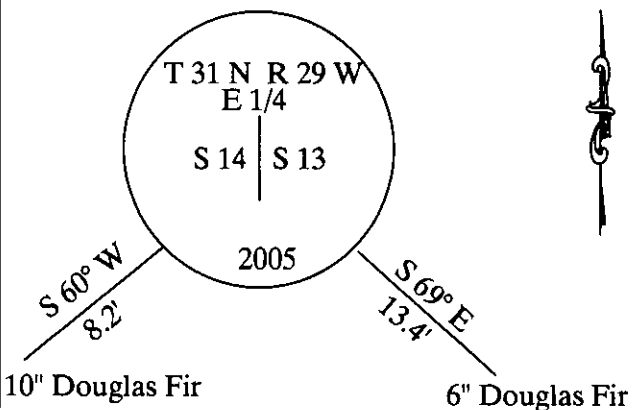

CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I, KENNETH E. DAVIS

I certify that this record correctly represents work performed in any direction in compliance with the

"Corner Recordation Act"

(70-2-101) KENNETH E. DAVIS

Signature of Surveyor & Seal

Date: 07/13/2005 Reg. No. 975-S

Employer: Surveying Inc

SKETCH OF CORNER

Office of Clerk and Recorder, County of _____

This "corner record" was filed for record on 185944 BOOK: CCR CC&R'S PAGE: 10814 Pages: 1

No. _____ STATE OF MONTANA LINCOLN COUNTY


In book No. _____ CORAL M. CUMMINGS CLERK AND RECORDER

FEE: \$0.00

BY: Garnie Derrin

TO: FILED

SECTION



Cross Index No. E 1/4 S 14 T. 31 N., R. 29 W., P.M.M.

THIS CORNER