

# CERTIFIED CORNER RECORDATION

CORNER W-E 1/64 S 14 T. 31 N., R. 29 W., P.M.M. LINCOLN COUNTY

RECORD:  
NONE

FOUND EVIDENCE:  
NONE

## PERPETUATION:


Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 30 inches long.  
From which

A 13 inch DBH Tamarack scribed T 31 N R 29 W W-E 1/64 S 14 BT. bears N 17° E 6.1 feet.

A 6 inch DBH Spruce scribed X BT. bears S 21° E 18.2 feet.

Painted 6 inch wide bands and attached bearing tree signs to trees.

MAGNETIC DECLINATION: 18° E

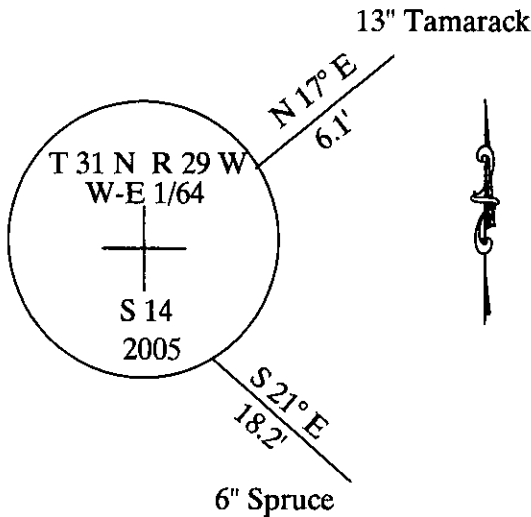

## CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I, KENNETH E. DAVIS

certify that this plan, map, and correctly represents work  
performed by me or under my direction in compliance with the  
"Corner Recordation act"  
(70-22-101 et seq., M.C.L.)

Signature of Surveyor & Recorder

Date: 07/13/2005

Employer: Swainson Inc

## SKETCH OF CORNER

## SECTION

Office of Clerk and Recorder, County of \_\_\_\_\_

This "corner record" was filed for record on 185946 BOOK: CCR CC&R'S PAGE: 10816 Pages: 1

was noted on the STATE OF MONTANA LINCOLN COUNTY


No. \_\_\_\_\_ RECORDED: 07/13/2005 9:16 KOI: CC&R'S

In book No. \_\_\_\_\_ CORAL M. CUMMINGS CLERK AND RECORDER

FEE: \$0.00

BY: George Clark

TO: FILED



Cross Index No. W-E 1/64 S 14 T. 31 N., R. 29 W., P.M.M.

THIS CORNER