

CERTIFIED CORNER RECORDATION

CORNER C-W-NE 1/64
S 14 T. 31 N., R. 29 W., P.M.M. LINCOLN COUNTY

RECORD:
NONE

FOUND EVIDENCE:
NONE

PERPETUATION:


Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 30 inches long.
From which

A 4.5 inch DBH Douglas Fir scribed X BT. bears N 11° E 15.3 feet.

A 9.5 inch DBH Douglas Fir scribed T 31 N R 29 W C-W-NE 1/64 S 14 BT. bears S 40° W 35.4 feet.

Painted 6 inch wide bands and attached bearing tree signs to trees.

MAGNETIC DECLINATION: 18° E

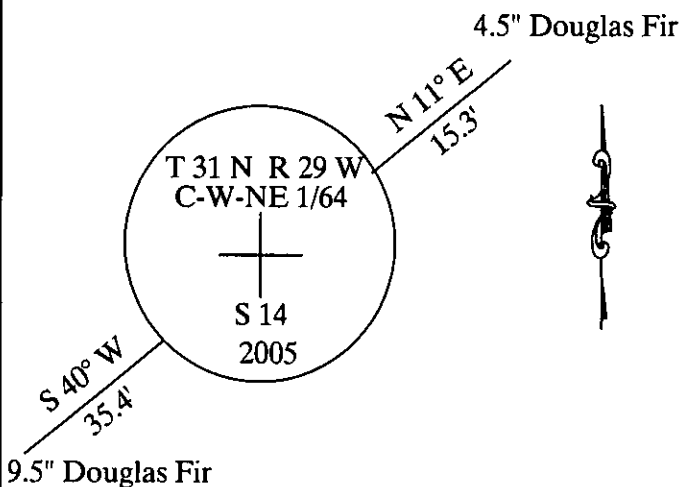

CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I, KENNETH E. DAVIS

certify that this Corner Record correctly represents work performed under my direction in compliance with the

"Corner Recordation Act" (7-22-01, et seq., MCA)

Signature of Surveyor or Seal

Date of Survey No. 4975-S

Enclosed Survey FNC

SKETCH OF CORNER

Office of Clerk and Recorder, County of _____

This "corner record" was filed for record on _____

was noted c 185947 BOOK: CCR CC&R'S PAGE: 10817 Pages: 1

No. _____ STATE OF MONTANA LINCOLN COUNTY

In book No RECORDED: 07/13/2005 9:17 KOI: CC&R'S

CORAL M. CUMMINGS CLERK AND RECORDER


FEE: \$0.00

BY: Geannie Davis

TO: FILED

Cross Index No. C-W-NE 1/64 S 14 T. 31 N., R. 29 W., P.M.M.

SECTION



THIS CORNER