

Corner 1/4 14 | 13 T. 31 N. R. 29 W. P.M.M. LINCOLN County

- I. 1903 Subdivision lines of fractional T31N. R29W by George A. Fessenden & Ranney Y. Lyman: A stone in place, 2x2x1 1/2 ft. above ground for 1/4 sec. cor. marked with a cross (X) at the exact corner point, and 1/4 on W. side of cross and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of corner. Pits impracticable.

2005 Certified Corner Recordation by Kenneth E. Davis, MT Reg. No. 4975S: No evidence found. Set a 3 1/4 in. aluminum cap stamped (shown below) on a 5/8 in. dia. rebar 30 ins. long. From which

A 10 inch DBH Douglas Fir, scribed T31N R29W 1/4 S 14 BT. bears S60°W, 8.2 feet. dist.

A 6 inch DBH Douglas Fir, scribed 1/4 S 13 BT. bears S69°E, 13.4 feet. dist.

Painted 6 inch wide bands and attached bearing tree signs to trees.

- II. Found: A 5/8 in. diam. rebar, with a 3 1/4 in. diam. aluminum cap, 3 ins. above ground, mkd. as shown below, from which:

A Douglas fir, 6 ins. diam., bears S69°E, 13.4 ft. dist., with a pitched face.

A Douglas fir, 9 ins. diam., bears S60°W, 8.2 ft. dist., with a pitched face.

Note: A search was done to try and find any remaining evidence of the original corner monument and bearing trees and no evidence was found. Accepted the found Davis monument for the 1/4 sec. cor. for secs. 13 and 14 which was set at mid point between the NE sec. cor. S14 and the SE sec. cor. S14. The SE sec. cor. S14 remonumented by the BLM and E 1/4 sec. cor. set by Davis were used in a recent Forest Service survey and the distance between the corners were found to be within acceptable limits. See Certificate of Survey No. 3425 by Kenneth E. Davis, MT Reg. No. 4975S. on file at the Lincoln County Courthouse, Clerk and Recorders office.

- III. Painted the scribed faces red and 6 in. wide red bands around the bearing trees. Attached Land Survey Monument and Bearing Tree signs to bearing trees. Set a 6 ft. steel post 3 ft. South, with "Land Survey Monument" and Property Boundary" decals attached.

LAT 48°26'59.65309"N  
LONG 115°15'28.00997"W  
NAD 83

Date of Fieldwork: 5/4/2011


Survey crew: Tom Hommel

Magnetic declination: 20° East assumed

Equipment used: Hand compass and loggers tape



U.S. Forest Service, Supervisors Office, 31374 Hwy. 2, Libby, MT 59923 (406) 293-6211

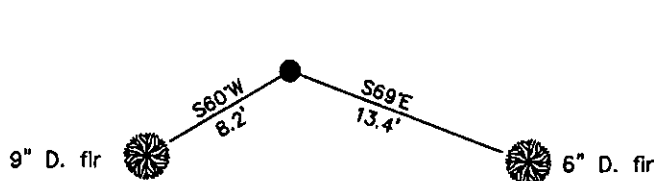

NOT TO SCALE

CERTIFICATION

I, Thomas M. Hommel, 10800LS  
certify the information shown herein is true and correct.

Thomas M. Hommel  
Signature of Surveyor & Seal

I, Mary Burkhardt, 9520LS  
certify that this corner monument correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (Act 22-101 of 1907, M.C.A.)

Mary Burkhardt  
Signature of Surveyor & Seal

Date: 3/16/2010 Reg. No. 9520LS

Employer: U. S. Forest Service

Office of Clerk and Recorder, County of Lincoln

237807 BOOK: CCR CC&R'S PAGE: 11957 Pages: 1

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 03/20/2012 8:34 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00


BY Jeanne D. Danner  
Deputy

TO: US FOREST SERVICE 31374 HWY 2, LIBBY, MONTANA 59923

Cross Index No. L 21 T. 31N. R. 29W. P.M., MT

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

Sec. 14

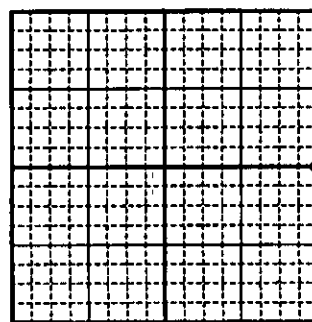

● corner this sheet