


- INSTRUCTIONS
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing, lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner N 1/16 Corner Section 1 T. 31N R. 29W P.M.M. Lincoln County

1. Corner was not previously set.
2. Set 3" diameter aluminum monument, 30 inches long, from which a 6" Pine bears N 1° W 2.4 feet. scribed N1/16 S1 B.T. and posted. A 6" Pine bears N69° E 27.0 feet scribed N1/16 S6 B.T. and posted. A location poster attached to a 12" Pine bears N5° E 9.9 feet. Lines blazed and painted North and West from monument.

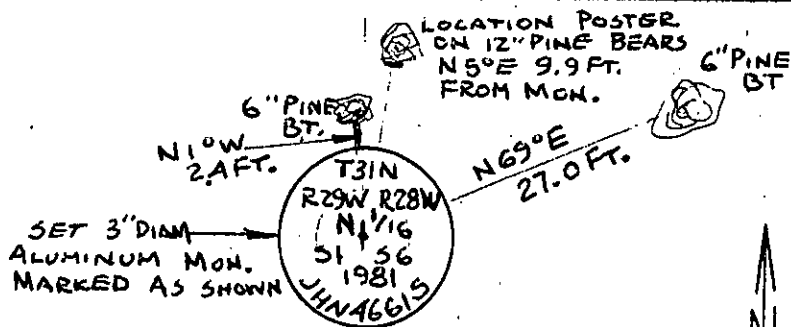

SKETCH OF CORNER

CERTIFICATION

I, David Stanley
certify the information shown herein is true and correct.
David Stanley
Signature Ground Party Chief

I, Jack H. Ninneman
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)
Jack H. Ninneman
Signature of Surveyor & Seal

Date: 1/14/82 Reg. No. 4661S

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the January 18 day of 1982 was noted on the cross-index plat and is assigned page No. 1482, in book No. 1

Eleanor L. Vaughn by Betty L. Conces
County Official deputy

Cross Index No. B-25 T. 31N R. 29W P.M.M.

Sec. 1			

• corner this sheet