


INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner Northeast Corner Section 1 T. 31N R. 29W P.M.M. Lincoln County

1. 80 Chains: Set a slate stone 20 X 16 X 10 inches, 15 inches in the ground for Corner of Twp. 31 & 32 N., R. 28 & 29 W marked with six notches on each edge, from which a Pine 28 inches diameter bears N52°40'E 140 links distance marked T32N., R 28W S31B.T. A Pine 30 inches diameter bears S8°40'E 41 links distance marked T31N., R. 28W S6B.T. A Tamarack 16 inches diameter bears S53°15'W 49 links distance marked T31N., R. 29W S1S.T. A Fir 12 inches diameter bears N6°30'W 85 links distance marked T32N., R. 29W S36B.T..
2. Found: original stone with 6 notches on each edge from which a Larch snag 16" diameter bears S53°15'W 32.2 feet the scribing is still visible.
3. Set a 3" aluminum capped monument marked as shown below, from which an 8" Larch bears N35°E 28.5 feet scribed S31 T32N., R. 28W B.T. & posted A 14" Fir bears S30°E 8.4 feet scribed S6 T31N., R. 28W B.T. & posted. An 8" Fir bears S19°W 3.6 feet scribed S1 T31N., R. 29W B.T. & posted. An 8" Fir bears N35°W 7.0 feet scribed S36 T32N., R. 29W B.T. & posted. A location poster on a 4" Fir bears N45°E 5.0 feet.



Set a 3" aluminum capped monument marked as shown.

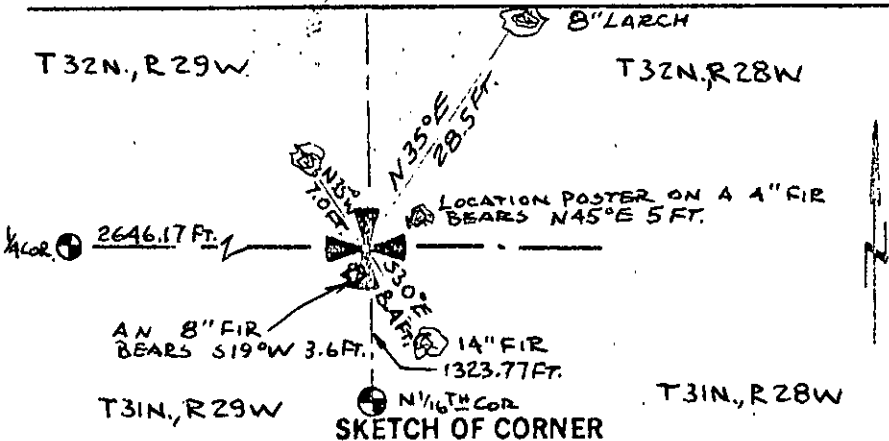

CERTIFICATION

I, David Stanley certify the information shown herein is true and correct.

*David Stanley*  
Signature Ground Party Chief

I, Jack H. Ninneman certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

*Jack H. Ninneman*  
Signature of Surveyor & Seal

Date: 12/21/81 Reg. No. 4661S

Employer: Ninneman Engineering, Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the January 18<sup>th</sup> day of 1982 was noted on the cross-index plat and is assigned page No. 1489, in book No. 1

*Eleanor S. Laughy* County Official  
*Betty L. Conroy* Deputy

Sec. 1
