

CERTIFIED LAND CORNER RECORDATION

1/4 Corner and E 1/16 Corner between Secs. 33 Twp. 31 N., R. 29 W. M.P.M. and Sec. 4 Twp. 30 N., R. 29 W., M.P.M.

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

SW Cor. Sec. 33 Twp. 31 N., R. 29 W., M.P.M. a standard brass cap monument
 Coordinates Y. 564050.00 X. 586936.77 by C. of E.
 1/4 Corner between Secs. 4 and 33 destroyed.
 SE Cor., Sec. 33 Stone and 2 BTs.
 C. of E. Coordinates Y 563663.18 X 592203.69 By C. of E.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
 TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


Monumented Date of work: 7/20/72

For 1/4 Corner set a standard brass cap monument from which A Pine 24 ins. in dia. bears S 72° E 58.6 feet dist. marked 1/4 S 4 BT. Posted
 A Pine 12 ins. in dia. bears N 68° W 68.3 feet dist. marked 1/4 BT Posted
 For E 1/16 Cor between Sec. 33 Twp. 31 N., R. 29 W., M.P.M. and Sec. 4 Twp. 30 N., R. 29 W. M.P.M. set a standard brass cap monument from which a Fir 10" in Dia. bears S 25° W 59.9 feet dist. Marked W 1/16 BT and Posted.
 A Pine 10" in dia bears S 62° W 71.5 feet dist. Marked W 1/16 Bt. and Posted.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
 (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

SEE REVERSE SIDE

Surveyor's Seal

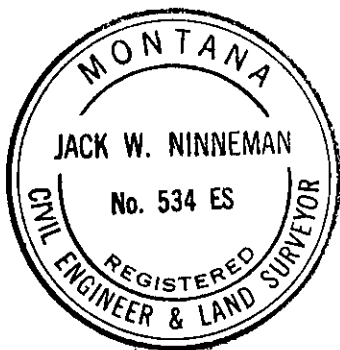

I, Jack H. Ninneman
 certify that the information shown herein is true and correct.

Jack H. Ninneman
 Signature of Ground Party Chief

DIAGRAM OF CORNER:

N.
 See reverse side

I, Jack W. Ninneman
 certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Jack W. Ninneman
 Signature of Surveyor

= Corner recorded on the sheet

Mont. 534 E.S.
 Registration Number

Office of Clerk and Recorder, County of Lincoln
 This "corner record" was filed for record on the 25th day of July, 1972, was noted on the cross-index plat and is assigned page No. 1, in book No. 276.
Eleanor L. Vaughn

	County Official	
Cross Index No. <u>211</u>	<u>31</u>	<u>29</u>
<u>A11</u>	<u>30</u>	<u>29</u>
<u>A12</u>	<u>20</u>	<u>29</u>

Coordinates and bearings
on Montana Lambert Grid
North Zone

For 1/4 Corner set a standard brass cap monument from which A Pine 24" in dia. bears S 72° E 58.6 feet dist. marked 1/4 S 4 BT. Posted A Pine 12" in dia. bears N 68° W 68.3 feet dist. Marked 1/4 BT. Posted

For E 1/16 Cor. between Sec. 33 Twp. 31 N., R. 29 W., M.P.M. and Sec. 4 Twp. 30 N. R. 29 W., M.P.M., set a standard brass cap monument from which a Fir 10" in dia. bears S 25° W 59.9 feet dist. marked W 1/16 BT. and Posted. A Pine 10" in dia bears S 62° W 71.5 feet dist. Marked W 1/16 BT. and Posted.

