## CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)


No Original Record. No Evidence Found.

## DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: Oct. 1980 W 1/16 Set an aluminum pipe 2 1/2" X 30", 26" in ground, with cap marked as shown where for exact corner position from which: A Larch 9 ins., dia. bears S37°W, 29.50 feet distance, Scribed-W/1/16 B.T. A Larch, 8 ins., dia., bears S65°E, 26.10 feet distance, 42325 Scribed W 1/16 B.T.

512 980

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

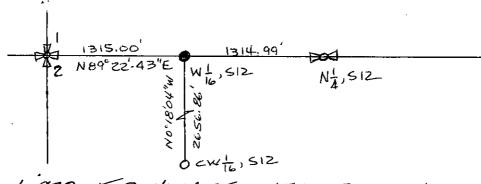

1-930 FOR VIEW OF ENTIPE SECTION

Surveyor's Seal



I, Kenneth Kern

certify that the information shown herein is true and correct.

Kenneth L Keen

Signature of Ground Party Chief


ı, Melvin D. Lauteren

certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Laulere Signature of Surveyor

DIAGRAM OF CORNER:

SIZ, T3/N, R29W



= Corner recorded on the sheet

Will, S12

4232-5 Registration Number

Office of Clerk and Recorder, County of ...... This "corner record" was filed for record on the 31st day of Merenley 1980, was noted on the cross-index plat and is assigned page No. 140, in book No. County Official Cross Index No. E-22 T 31N Form 125—7887