## CERTIFIED LAND CORNER RECORDATION

Cadastral Retracement ½ cor. 29/28 T31N R30W Montana Principal Meridian

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

T31N R30W Montana Principal Meridian G.L.O. notes book 8958 page 200 has an iron post 30" long, 2½" in diameter, 26" in the ground with brass cap marked: T31N R30W

> Found brass cap in good condition and undisturbed.

s29 | s28

Record: 28" pine bearing \$282 E, 79 lks., marked \$288 BT Found: Bearing tree alive and still 28" in diameter

Record: Snag 30" in diameter bearing S29 $\frac{1}{2}$ °W, 58 lks., marked  $\frac{1}{4}$  S29 BT Found: Snag measured 35" in diameter with same bearing and distance as the bearing tree and the only visible markings  $\frac{1}{4}$  BT

Continued on reverse side
DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: 4./8/.7.4.


No added monumentation....

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

Sketch on reverse side

Surveyor's Seal	I,James R. Staples	DIAGRAM OF CORNER:	
·	certify that the information shown herein is true and correct.	N.	
JOHN C. ERICKSON 3979 S  SURVENIMENTAL STREET	Signature of Ground Party Chief  JOHN C. ERICKSON	S29 S2	S28
	certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.  Signature of Surveyor	= Corner recorded	on the sheet
	39795 Registration Number		

Office of Clerk and Recorder, County of Juncoln	
	Man 19.89, was noted on the cross-index plat and is
assigned page No. 4004, in book No	County Official
Form 1253690	Cross Index No. T9 T 31N R 30W Mer.

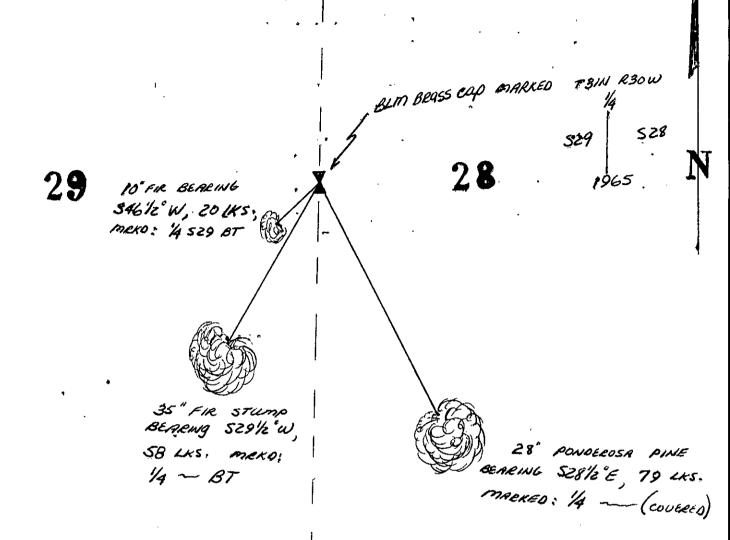

Description of evidence and original record continued

Record: 8" fir bearing S462°W, 20 lks., marked \$ S29 BT Found: Bearing tree alive and still growing and presently 10" in diameter