CERTIFIED LAND CORNER RECORDATION

Cadastral Retracement 1/4 cor. sec. 32/33 T31N R30w Mont. Prin. Meridian Description of corner evidence found, and original record (IF KNOWN)

T31N R30W M.P.M. G.L.O. notes book 8942 page 43 has 2½" pipe 30" long 15" in the ground in a mound of stone 4' in diameter with standard BLM brass cap marked 1 Found brass cap in good condition. S32 **S33**

1964

Record: Stumphole bearing N71°E 59 1ks. with remains of tree on ground & visible scribe \(\frac{1}{4} \) S33----- Found stump bearing N61°E 51 1ks. with scribe A S33。

28" dead pine bearing S41°W 7 lks. in distance marked $\frac{1}{4}$ S32---- snag bearing S39°W dist 6 lks. with scribe of $\frac{1}{4}$ S32 Record:

Continued on reverse side..... DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: 3/28/74


No added monumentation.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

REVERSE SIdE

DIAGRAM OF CORNER: TBM R30W Surveyor's Seal correct. anno 32 33 Signature of Ground Party Chief JOHN C. ERICKSON certify that I have carefully performed or reviewed the JOHN C. work done on the diagrammed corner as reported on this recordation form and approve the same. FRICKSON 3979 S = Corner recorded on the sheet Mul GISTERES SURVEY Signature of Surveyor 3979 S Registration Number

Office of Clerk and Recorder, County of ... This "corner record" was filed for record on the 25 day of ______ 19....., was noted on the cross-index plat and is assigned page No....., in book No..... County Official 31N 30W Form 125-3690

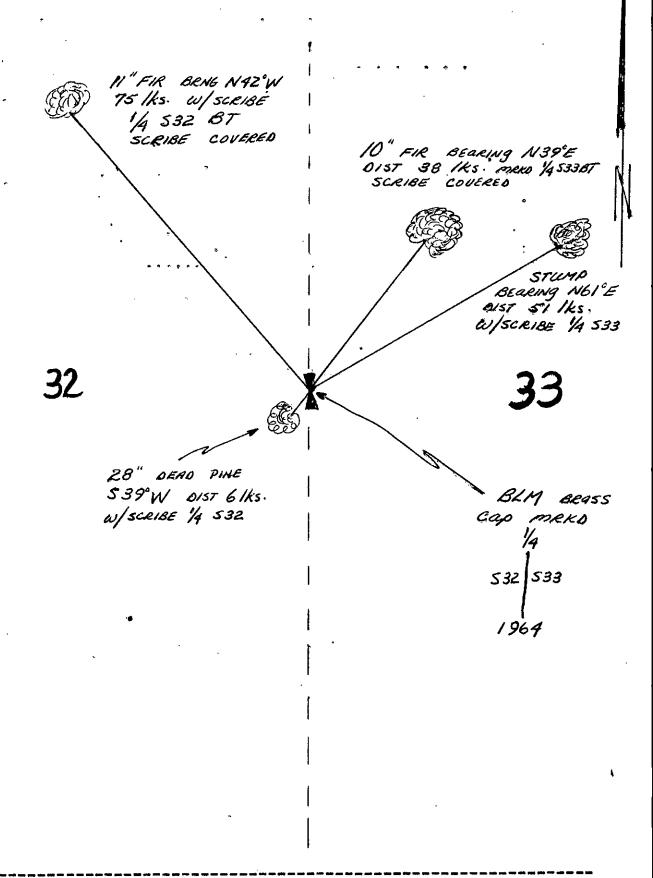

Evidence description from page 1 continued

Record: 6% fir bearing N39°E 38 lks. marked ½ S33 BT Found: Bearing tree alive and still growing and presently 10" in diameter.

Record: 6" fir bearing N42°W 75 lks. marked $\frac{1}{4}$ S32 BT Found: Bearing tree alive and still growing and presently 11" in diameter.