## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.

2. Description of evidence found, not discrepancies in the record, state method of establishing lost or obliterated corners.

3. Description of measurers and accessories set to perpetuate the corner position.

4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.

5. Certification must be signed and scaled by Land Surveyor registered in the State of Montans.

6. Fill in Cross Index & Section Diagram at bottom of sheet.

\_\_\_P.M.M.\_\_\_\_Lincoln

\_\_ County


\_\_\_\_ T. \_\_\_31N R. \_\_30W

Corner\_

AP3

<b>CERTIFIED CORNER REC</b>	UKDA	ATIUN
-----------------------------	------	-------

FOUND:  None.  Set a standard Forest Service 34" aluminum cap on a 3/4"x30" aluminum whaft 23" in the ground, 7" out of ground surrounded by a mound of stone. A 13" Larch Bearing Tree bears N60"%, 12.9 feet distant scribed AP3 BT. B 19" douglas fire Bearing Tree bears N60"%, 12.9 feet distant scribed AP3 BT. Distances were measured to a nail at side center of the tree. Trees were signed with blazes and scribing painted red. A 6" Steel poor with a Land Survey monument decal attached is 2.3 feet northerly. (Refer to diagram on back of this sheet for information on how corner was established.)  1. Sheet Steel Comment of the Steel Comm	RECORD: None.	%: · .
Set a standard Forest Service 3k" aluminum cap on a 3/4"x30" aluminum shaft 23" in the ground, 7" out of ground surrounded by a mound of stone. A 13" Larch Bearing Tree bears NGOW, 12.9 feet distant scribed AP3 BT. A 9" douglas fir Bearing Tree bears NGOW, 12.9 feet distant scribed AP3 BT. Distances were measured to a nail at side center of the tree. Trees were signed with blazes and scribing painted red. A 6" Steel poot with Land Survey monument decal attached is 2.3 feet northerly. (Refer to diagram on back of this sheet for information on how corner was established.)  13" LARCH BT  9"00UL FIR ST  AP3  P OULL FIR ST  SETCH OF CORNER  CEXTECATION  LightMuccutte  13" LARCH BT  LightMuccutte  14" LARCH BT  LightMuccutte  15" LARCH B		
WAYS, 24.4 feet distant scribed AP3 BT. A 9" douglas fir Bearing Tree bears N60"W, 12.9 feet distant scribed AP3 BT. Distances were measured to a nail at side center of the tree. Trees were signed with blazes and scribing painted red. A 6's teel post with a Land Survey monument decal attached is 2.3 feet northerly. (Refer to diagram on back of this sheet for information on how corner was established.)  ### LARCH BT  9" BOULD FAR ET  SKETCE OF CORNER  Office of Clerk and Recorder, County of Amach. This "corner record" was filled for record on May 16, 1975  was noted on the cross-index plat and is assigned page No. 735/ in County Official  County Official  County Official		
CERTECATION  L. JohnMarquette entity to information briefs is true and correct,  Plantage R. Staples  Originature Orocad Party Chief  James R. Sta	ground, 7" out of ground surrounded by a mound of N24°E, 24.4 feet distant scribed AP3 BT. A 9" doug feet distant scribed AP3 BT. Distances were measured trees were signed with blazes and scribing painted a monument decal attached is 2.3 feet northerly. (Ref.	stone. A 13" Larch Bearing Tree bears glas fir Bearing Tree bears N60°W, 12.9 ed to a nail at side center of the tree. ced. A 6' Steel post with a Land Survey
CERTEICATION  L. JohnMarquette  overlity to information in true and correct.  Plants R. Steples  overlity the information in true and correct.  Plants R. Steples  overlity the title correct proposes as well become the correct proposes as well as the correct proposes as well as the correct proposes as the correct prop		
CERTIFICATION  L. JohnMarcuette  ortily the information barries is true and correct.  Plantage R. Staples  Office of Clerk and Recorder, County of April 2006.  Sketch of County of April 2006.  Sec. 15  Sec. 15  County Official  County Official  County Official  County Official		•
U.S. FOREST SERVICE 9"00UG FIRET  13" LARCH BT  Signature Ground Party Chief  Signature Ground P		•
Office of Clerk and Recorder, County of Smesh. This "corner record" was filed for record on May 16,1995  was noted on the cross-index plat and is assigned page No. 735/ in book No.  County Official  Sec. 15  Sec. 15  County Official	U.S. FOREST SERVICE  9"DOUG FIRET AP3  P	I. JohnMarquette certify the information abown herein is true and correct.  Name of Signature Ground Party Chief  I. James R. Staples certify that this corner Record correctly represents with the Color.  Recordation Act* (70-22-101, et seq., M.C.A.)  JAMES R.  STAPLES  Signature of Surveyor & Seal  Date: 5-2-95  Reg. No. 9958  Employer: J.R.S. Surveying, Inc.
book No. Colal M. Cumming B. DB County Official	record" was filed for record on May 16, 199	Sec. 15
	book No. Cotal M. Count	mming B, D3 ty Official

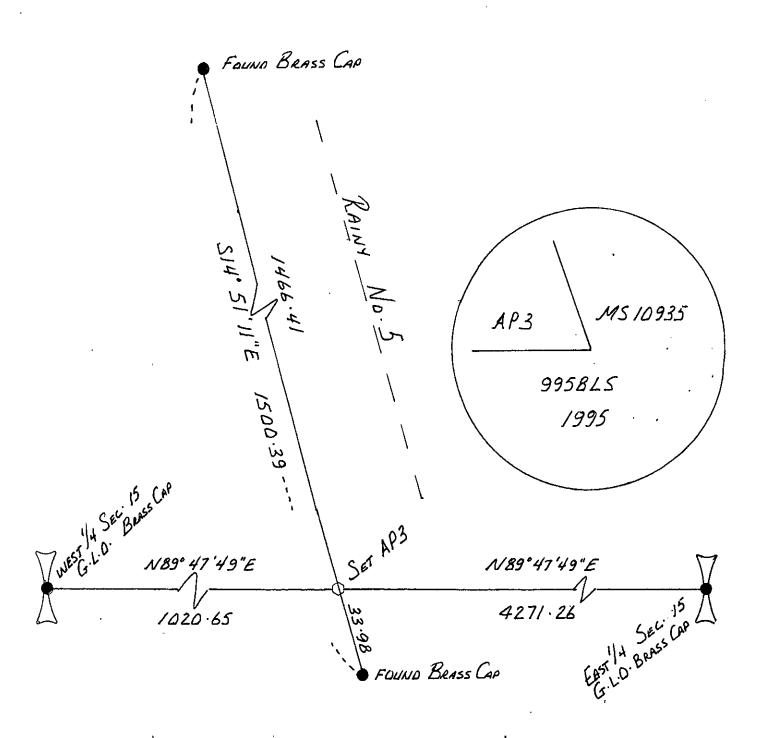

AP3 WAS SET AT THE INTERSECTION OF THE EAST-WEST CENTER OF SECTION 15
AND THE WESTERLY LINE OF RAINY No.5.