## CERTIFIED CORNER RECORDATION

Corner	MS 10964 COR. 4	Sec.	26	T.	31N	R.	30W	P.M., MT.	Lincoln	County
	EASTSIDE NO. 7									

1976 Original B. L. M. survey by Arthur C. Rader: Cor. No. 4., identical with Cor. No. 3 of the Eastside No. 8 lode, and I. Cor. No. 2 of the Eastside No. 9 lode, all of this survey. Set an iron post, 1 in. diam., 30 ins. long, 24 ins. in the ground, with brass cap mkd. 4-ES7 3-ES8 2-ES9-10964; from which

A pine, 12 ins. diam., bears N 56° 00' E, 3.0 ft. dist. mkd. 4-ES7-10964 BT. A fir, 20 ins. diam., bears N 25° 00' E, 24.6 ft. dist., mkd. 3-ES8-10964 BT. A cor. of the location bears \$ 37° 07'W, 28.66 ft. dist.

Found a 1 1/2 in. diam. iron pipe, 18 ins. above ground, firmly set, with a 3 in. diam. brass cap, mkd. as shown:. Π.



from which:


A fir stump, 12 ins. diam., bears N 25°E, 24.6 ft. dist., mkd. with visible scribe marks. A pine, 12 ins. diam., bears N 56°E, 3.0 ft. dist., mkd. with visible scribe marks. A steel guard post bears SW, 1.7 ft. dist., with a property boundary decal attached.

Ш. Established two new bearing trees:

A fir, 9 ins. diam., bears S 31°E, 36.5 ft. dist., mkd. 4 ES 7 10964 BT. A fir, 6 ins. diam., bears S 25°W, 17.8 ft. dist., mkd. "X" BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

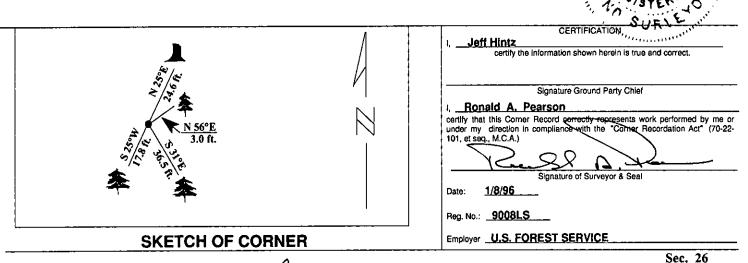

This "corner record" was filed for record Office of Clerk and Recorder, County of on 2-28-96 was noted on the cross-index plat and is assigned page No. ummine in book No. \_ County Official

РММ

## **CERTIFIED CORNER RECORDATION**

Corner	MS 10964 COR. 4	Sec.	26	T.	31N	R.	<b>30W</b>	P.M., MT.	Lincoln	County
	EASTSIDE NO. 7									

1976 Original B. L. M. survey by Arthur C. Rader: Cor. No. 4., identical with Cor. No. 3 of the Eastside No. 8 lode, and I. Cor. No. 2 of the Eastside No. 9 lode, all of this survey. Set an iron post, 1 in. diam., 30 ins. long, 24 ins. in the ground, with brass cap mkd. 4-ES7 3-ES8 2-ES9-10964; from which

A pine, 12 ins. diam., bears N 56° 00' E, 3.0 ft. dist. mkd. 4-ES7-10964 BT. A fir, 20 ins. diam., bears N 25° 00' E, 24.6 ft. dist., mkd. 3-ES8-10964 BT. A cor. of the location bears \$ 37° 07'W, 28.66 ft. dist.

Found a 1 1/2 in. diam. iron pipe, 18 ins. above ground, firmly set, with a 3 in. diam. brass cap, mkd. as shown:. II.



from which:


A fir stump, 12 ins. diam., bears N 25°E, 24.6 ft. dist., mkd. with visible scribe marks. A pine, 12 ins. diam., bears N 56°E, 3.0 ft. dist., mkd. with visible scribe marks. A steel guard post bears SW, 1.7 ft. dist., with a property boundary decal attached.

III. Established two new bearing trees:

A fir, 9 ins. diam., bears S 31°E, 36.5 ft. dist., mkd. 4 ES 7 10964 BT. A fir, 6 ins. diam., bears S 25°W, 17.8 ft. dist., mkd. "X" BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

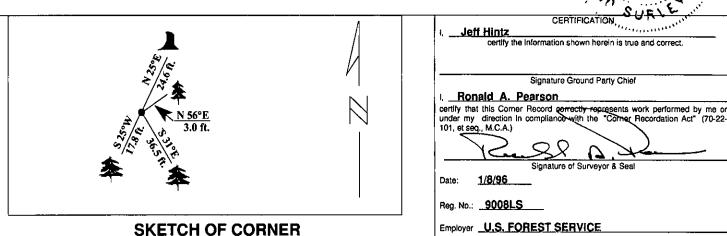

SKETCH OF CORNER	Employer	S. FOREST SERVICE			
ρ.	0				
Office of Clerk and Recorder, County of me		_			
on $2-28-96$ was noted on the c	oss-index plat and is assigned p	age No. 8206,			
in book No	M. Cummines County Official	By DB			
	•		<ul><li>com</li></ul>	er this sheet	

Cor. 4 M.S. 10964 Eastside No. 7 30W 31N