CERTIFIED CORNER RECORDATION

Corner S20|S21 / S29|S28 T. 31 N. R. 31 W. P.M.M. LINCOLN County

I. 1893 Original Subdivision and Meanders of Fractional T.31N., R.31W. by Daniel P. Mumbrue: Set a 4 ft. by 4 ins. square wood post and 4 bearing trees

1963 B.L.M. Remonumentation by Gerald F. Pittman et al: The cor. of secs. 20, 21, 28 and 29, monumented with the remains of a wooden post, firmly set and mkd. as described in the offical record, and witnessed by the remains of three of the origianl bearing trees. At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T31N R31W
S20 | S21
S29 | S28
1963

from which the remains of the origianl bearing trees:
- A stump, 24 ins. diam, bears S43°E, 64 lks. dist., with illegible marks. (Record)
- A stump, 20 ins. diam, bears S25 1/2°W, 99 lks. with illegible marks. (Record S27°W, 99 lks.)
- A stump, 30 ins. diam, bears N78 1/2°W, 40 lks. dist., visible marks T3 R31W S20. (Record)

the new bearing trees
- A fir, 5 ins. diam, bears N29 1/4°E, 10 lks. dist., mkd. T31N R31W S21 BT.
- A pine, 6 ins. diam, bears S33 1/2°E, 35 lks. dist., mkd. T31N R31W S28 BT.
- A pine, 16 ins. diam, bears S22 3/4°W, 50 lks. dist., mkd. T31N R31W S29 BT.
- A pine, 6 ins. diam, bears N59 1/4°W, 13 lks. dist., mkd. T31N R31W S20 BT.

Bury the remains of the original wooden post alongside of the iron post.

1988 Certified Corner Recordation by Alvah F. Hughes, MT Reg. No. 7322LS: Finds the B.L.M. monument as described, the remains of the original 1893 G.L.O. bearing trees and the 1963 B.L.M. bearing trees. Sets a galvanized steel guard post 3 ft. West of the monument. Painted red bands around bearing trees and attached BT and Land Survey Monument signs.

II. Found a 2 1/2 in. diam. iron pipe, 3 ins. above the ground, firmly set with a 3 1/4 in. diam. B.L.M. brass cap marked as shown above, from which:

- A fir, 9 ins. diam, bears N27°E, 6.3 ft. dist., mkd. with a healed face.
- A pine, 8 ins. diam, bears S34°E, 22.9 ft. dist., mkd. with a healed face.
- A down pine, 20 ins. diam, bears S22°W, 32.9 ft. dist., mkd. with a healed face.
- A pine, 8 ins. diam, bears N56°W, 8.2 ft. dist., mkd. with a healed face.

III. Establish one new bearing tree:

- A fir, 13 ins. diam, bears S59°W, 18.3 ft. dist., mkd. T31N R31W S29 BT.

Painted red the scribed faces and 6 in. bands on the bearing trees. Attached Land Survey Monument and Bearing Tree signs.
Date of Fieldwork: 11/6/2007
Survey crew: Steve Boyer, Tom Hommel
Magnetic declination: 20° East assumed
Equipment used: Hand compass and loggers tape
U.S. Forest Service, Supervisiors Office, 1101 Hwy. 2 West, Libby, MT 59923 (406) 293-6211

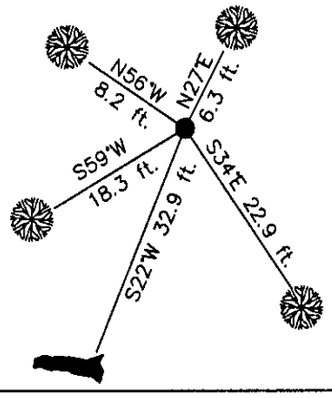

SKETCH OF CORNER NOT TO SCALE

CERTIFICATION

I, Thomas M. Hommel 10800LS certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Steven A. Boyer certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (76-22-101 et seq., M.C.A.)

Signature of Surveyor & Seal

Date: 1/2/2008 Reg. No. 9750LS

Employer: U. S. Forest Service

MONTANA STEVEN A. BOYER 9750LS REGISTERED LAND SURVEYOR

Office of Clerk and Recorder, County of Lincoln

208439 BOOK: CCR CC&R'S PAGE: 11172 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 01/03/2008 1:59 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: $0.00 BY Jill Blondell, Deputy
TO: FILED ,

Sec. 20



Cross Index No. R-9 T. 31N. R. 31W. P.M., MT

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

● corner this sheet