

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner SEC. 23 | W 1/16  
SEC. 26 T. 31 N. R. 31 W. P.M.M. Lincoln County

1. No previous record established.
2. No evidence found.
3. 3/19/84 Established Corner:


Set a 5/8 inch dia. x 24 inch long rebar with 1 1/4 inch dia. yellow PVC cap stamped: MDL 4232-S;

from which new bearing trees:

Posted 4/7/84

A Doug. Fir, 19 ins. dia., bears S82°W, 89.7 feet distance, marked: W 1/16 S26 BT.

A Doug. Fir, 15 ins. dia., bears N02°E, 36.6 feet distance, marked: W 1/16 S23 BT.

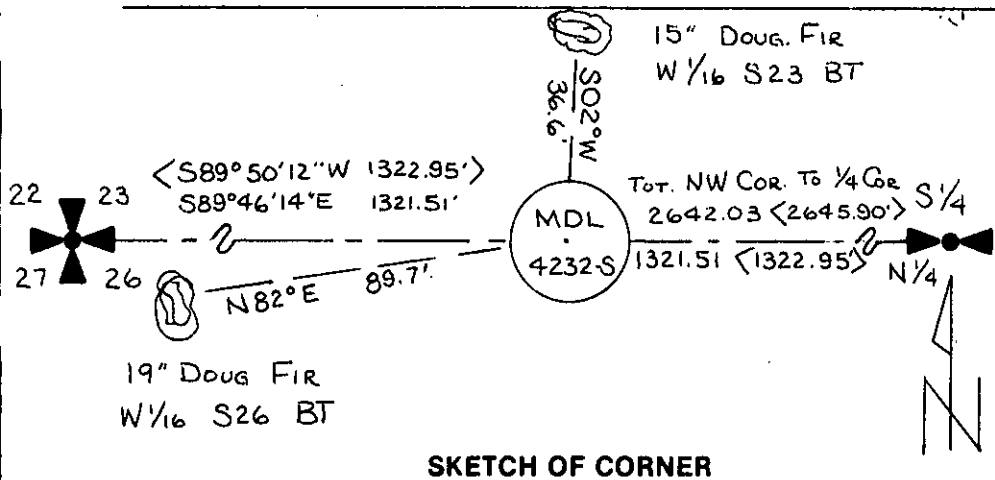

SKETCH OF CORNER

CERTIFICATION


I, L. A. Dolezal  
 certify the information shown herein is true and correct.  
*L. A. Dolezal*  
 Signature of Ground Party Chief

I, M. D. Lauteren  
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, M.C.A.)  
*M. D. Lauteren*  
 Signature of Surveyor & Seal

Date: 4/9/84 Reg. No. 4232-S  
 Employer: Kootenai Engineering, Inc.

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the 10<sup>th</sup> day of April 19 84, was noted on the cross-index plat and is assigned page No. 2606, in book No. Janet BF Siegel by Betty L. Conced County Official Deputy

Cross Index No. \_\_\_\_\_ T. \_\_\_\_\_ R. \_\_\_\_\_ P.M.M.



• corner this sheet