CERTIFIED LAND CORNER RECORDATION

SET IN SECTION 35 TWP. 31 N., R. 31 W., M.P.M.

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

North $\frac{1}{4}$ Corner and NE Corner of Sec. 35 have been perpetuated by B.L.M. (Standard Brass Cap. Monuments)

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: Aug. 1973

SEE DIAGRAM ON REVERSE SIDE

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.

(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

SEE DIAGRAM ON REVERSE SIDE

Surveyor's Seal

I, Jack H. Ninneman

certify that the information shown herein is true and correct.

Signature of Ground Party Chief

I Jack W. Ninneman

certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

O = Corner recorded on the sheet

DIAGRAM OF CORNER:

Signature of Surveyor


Montana License #534 E.S.

Registration Number

W 20

		•				
Office of Clerk and Recorder, County of June 1						
241	al , a					
This "corner record" was filed for record on the 214 day of	/ aventer 19 13,	was noted	on the c	ross-i	ndex plat	and is
	Eleanor L. Vary	10	an	1.	/	10
assigned page No. 296 , in book No.	xeanor of Vary	In De	17 / 1 / 1 / 1 / 1 / 1 / 1 / 1 / 1 / 1 /		aldery	Defet.
	<i>0</i> 0	ounty Off	Liciai C			7
5071/ 405 - 41400	Cross Index No. V-20	Т	31	R	3/	Mer

RECORDATION OF MONUMENTS SET IN SECTION 35 TWP.31 N., R.31 W., M.P.M.

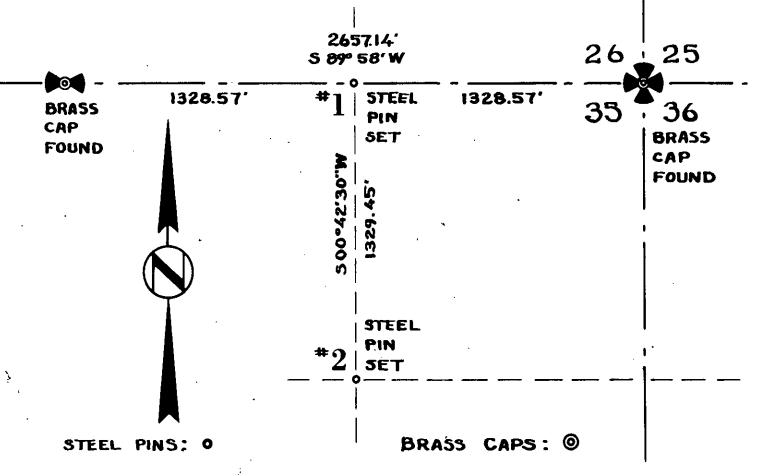

- #I Set a steel pin for N 1/16 E Between Sections 35 and 26 Both of Twp. 31 N., R. 31 W., M.P.M. from which a Location Poster bears West 20 feet.
- #2 Set a steel pin for C 1/16 N.E. in Section 35 Twp. 31 N., R. 31 W., M.P.M. With a Location Poster.

Basis of line 1 to 2 is the previously established line (by others) of Collinson Tracts, a recorded subdivision of Lincoln County, Montana.