


# CERTIFIED CORNER RECORDATION

Corner **C-N-SW** Sec. **26** T. **31N** R. **31 W** P.M., MT **Lincoln** County  
**1/64**

- I. 1975 Certificate of survey No. 135 By J.B. Reynolds No. 1868S: Set a 5/8 in. rebar.
- II. Found a 5/8 in. rebar, protruding 1 in. above the ground, firmly set, no cap.
- III. At the position determined by survey, accepted the found monument and set a 30 in. long, 2 1/2 in. diam. aluminum pipe, 25 ins. in the ground, with a 3 1/4" diam. aluminum cap mkd. as shown:

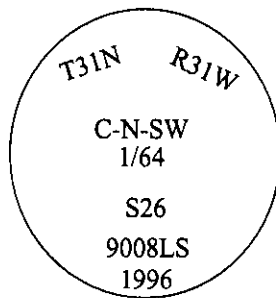

from which:


A pine, 7 ins. diam., bears S18°W, 12.4 ft. dist., mkd. "X BT".  
 Powerpole, bears S72°W, 10.7 ft. dist.

Placed accepted found monument inside pipe.

Painted bearing tree and attached Land Survey Monument and Bearing Tree signs.



Magnetic Declination: 20° East.

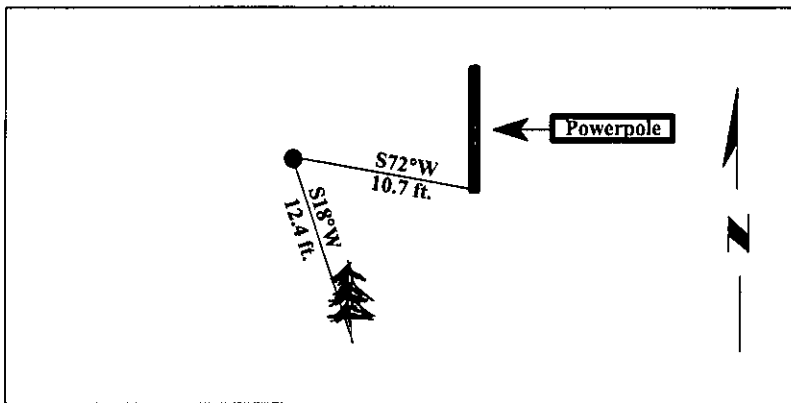

**SKETCH OF CORNER**

CERTIFICATION

I, Thomas M. Hommel  
 certify the information shown herein is true and correct.

*Thomas M. Hommel*

I, Ronald A. Pearson  
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

*Ronald A. Pearson*  
 Signature of Surveyor & Seal

Date: 12/30/96

Reg. No.: 9008LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on FEB 3, 1997 and was noted on the cross-index plat and is assigned page No. 9098, in book No. \_\_\_\_\_

**CORAL M. CUMMINGS**  
*Coral M. Cummings*  
 County Official

