CERTIFIED CORNER RECORDATION

Corner SW SECTION Sec. 4 T. 31N R. 31W P.M., MT Lincoln County

- I. 1901 original G.L.O. Record by Abram L. Jaqueth: Set a cottonwood post 3 ft. long, 5 ins. square, 24 ins. in the ground, for the corner of secs. 4, 5, 8 and 9, marked T31N S4 on NE, R31W S9 on SE, S8 on SW and S5 on NW faces, with 5 notches on S and 4 notches on E edges, from which:
 - A cottonwood 10 ins. diam., bears N 11°E, 33 lks. dist., marked T31N R31W S4 BT.
 - A spruce 30 ins. diam., bears S 65°15'E, 70 lks. dist., marked T31N R31W S9 BT.
 - A spruce 18 ins. diam., bears S 8°W, 40 lks. dist., marked T31N R31W S8 BT.
 - A cottonwood 10 ins. diam., bears N 10°W, 20 lks. dist., marked T31N R31W S5 BT.

1977 Certificate of Survey #415 filed in Lincoln County Courthouse by J. H. Ninneman #4661-S: Set BC monument and two BT's scribed and posted, set location poster.

II. Found a 2 1/2 in. diam. iron pipe, 8 in. above ground, firmly set, with a 3 1/4 in. brass cap mkd. as shown:




from which:

A aspen, 13 ins. diam., bears S28°E, 82.6 ft. dist., with visible scribing. A aspen, 12 ins. diam., bears S43°W, 80.4 ft. dist., with visible scribing.

III. Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East

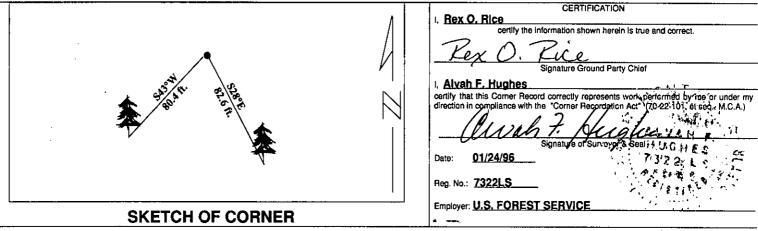

SKETCH OF CORNER	R Employer: U.S. FOREST SERVICE	
Office of Clerk and Recorder, County of	NCOLN . This "corner record" was filed for record ne cross-index plat and is assigned page No. 9722,	Sec. 4
in book No	CORAL M.CUMMINGS County Official By DIB	• - corner this sheet

Cross Index No. E-9

^{r.} 31N ^{a.} 31W