CERTIFIED CORNER RECORDATION

Corner	CWW NW	Sec. 24	T.	31N	R.	31W	P.M., MT	Lincoln	County
	1/256								

I. <u>1978 Corner Recordation filed in Lincoln County Courthouse by Stanley J. Skousen #2532-S</u>: No record found. No evidence found. Set a 2 1/2 in. diam., 30 ins. long, alum. pipe with cap, 24 ins. in the ground.



Established two bearing trees:

A fir, 9 ins. diam., bears S68°E, 21.2 ft. dist., mkd. "CWWNW 1/256 S24 BT". A pine, 7 ins. diam., bears N78°W, 12.6 ft. dist., mkd. "CWWNW 1/256 S24 BT".

Raised a mound of rock around monument.

Refer to Cert. of Survey #727, subdivisions of Sec. 24, T31N R31W, as recorded in Lincoln County Courthouse, Libby, Montana.

II. Found a 2 1/2 in. diam. alum. pipe, 12 in. above ground, firmly set, with a 3 1/4 in. alum. cap, in a collar of stone, mkd as shown.



from which:


A fir stump, 14 ins. diam., bears S68°E, 21.2 ft. distant.

A pine, 10 ins. diam., bears N78°W, 12.6 ft. dist., with a healed face.


III. Established one new bearing tree:

A pine, 10 ins. diam., bears N10°W, 24.4 ft. dist., mkd. "C W W NW 1/256 S24 BT".

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs. Magnetic Declination: 20° East

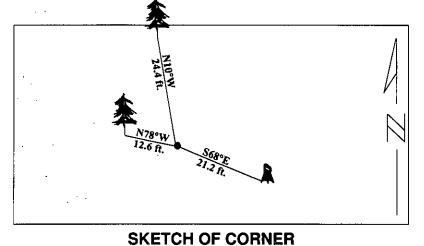

_	CERTIFICATION							
	I. Rex O. Rice							
	certify the information shown herein is true and correct.							
	ローヘア							
	Kex (). Rice	ALTERNA TO						
	Signature Ground Party Class	ONTAN	<u> </u>					
	ι Alvah F. Hughes	N	W					
	certify that this Corner Record correctly represents work	erformed by me by	inder y					
	direction in compliance with the "Corner Record tion Act"	(70-22-101, et seq.,	I.C.A.					
		ALYAH F.						
	Must die	d Wighes						
	Signature of Survivoos Seal	7322LS	: ~ !					
	Date: 01/30/96		Ž					
	W. 2. V	En E0.	$\mathcal{Z}A$					
	Reg. No.: 7322LS	COSTE						
	- Wash	VAL LAND	Ø					
	Employer: U.S. FOREST SERVICE	WE THIS	9					
		Million						



Cross Index No. O.25-21.25 T. 31N R. 31W PM