

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


**CERTIFIED CORNER RECORDATION**

Corner 8 HES 935 T. 31N R. 32W P.M.M. Lincoln County

ORIGINAL USDA NOTES: USDA - Forest Service 1919

CORNER: 26 x 16 x 8 inch stone  
 "X" on 18" dia. Fir tree, bears N.11°12'E., 16 lks distance  
 "X" on 5" dia. Fir tree, bears S.19°32'E., 8 lks distance  
 Each blazed & scribed 8 HES 935 BT  
 Raised mound of stones, 4 ft. base, 2 ft. high, 3 1/2 feet distance.

EVIDENCE FOUND: 16 x 8 inch stone set in ground  
 12" Fir tree with blaze bears S. 19°E., 5.2 feet with K-tag  
 22" Fir tree with blaze bears N.11°E., 10.5 feet with K-tag

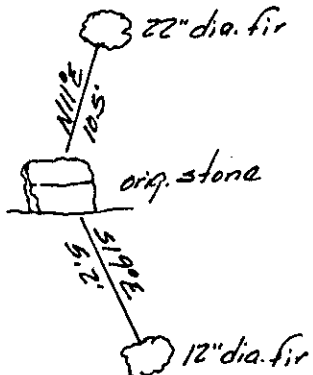

SKETCH OF CORNER

CERTIFICATION

I, \_\_\_\_\_ certify the information shown herein is true and correct.


Signature of Surveyor or Signatory

I, Robert S. Nutter, P.L.S. certify that this Corner Record correctly represents work performed by me or under my direct supervision with the "Corner Recordation Act" (M.C.L.A. 1972-10-21, 1981-11-11).

Signature of Surveyor or Signatory

Date: 11/30/82

Employer: Professional Consultants, Inc.

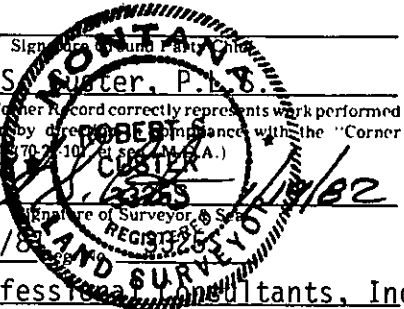

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the January 21 day of 1982 was noted on the cross-index plat and is assigned page No. 1494, in book No. 1

Eleanor L. Vaughn by Betty L. Conces  
 County Official Deputy

Cross Index No. M, N-21, 22 T. 31N R. 32W P.M.M.

Sec. 13


• - corner this sheet