

INSTRUCTIONS

1. Original and/or subs... record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 6 HES 935 T. 31N R. 32W P.M.M. Lincoln County

ORIGINAL USDA NOTES: USDA - Forest Service 1919

CORNER: 26 x 14 x 4 inch stone, marked 6 HES 935 on SW face; CC on NW face with "X" on top
 "X" on 8" dia. Fir tree, bears N.14°52'E., 35 lks distance
 "X" on 4" dia. Fir tree, bears N.24°30'W., 27 lks distance
 Each blazed & scribed 6 HES 935 BT

EVIDENCE FOUND: 14 x 4 inch stone, marked 6 HES 935 on SW face; Scribed CC on NW face,
 "X" on top
 "X" on blaze on 14" dia. Fir tree bears N.24°30'W., distance 18.0 feet

CERTIFICATION

I, _____
 certify the information shown herein is true and correct.

Signature of Registered Professional Land Surveyor

I, Robert S. Guster, P.L.S.


certify that this Corner Recordation was performed by me or under my direction in compliance with the "Corner Recordation Act" (MCA, 82-01, and S.M.A.)

Signature of Registered Professional Land Surveyor

Date: 11/30/81

Employer: Professional Consultants, Inc.

SKETCH OF CORNER

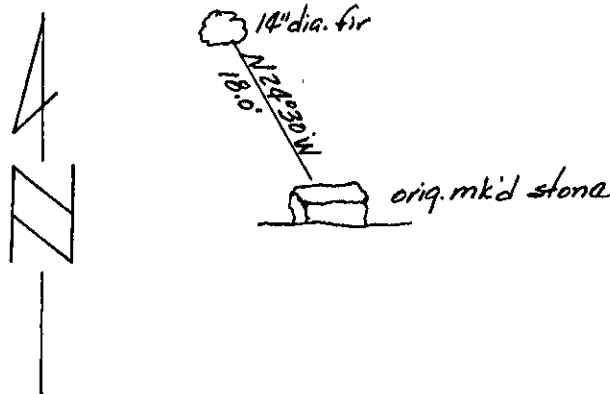


Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the January 21 day of 1982 was noted on the cross-index plat and is assigned page No. 1495, in book No. 1

Eleanor L. Vaughn by Betty L. Conner
 County Official Wayne

Cross Index No. M,N-21,22 T. 31N R. 32W P.M.M.

Sec. 13



• corner this sheet