

INSTRUCTIONS

1. Original and or subseq record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner 1 HES 579 T. 31 N R. 32 W P.M.M. Lincoln County

ORIGINAL G.L.O. NOTES: 1918

CORNER: Shale stone 40 x 13 x 8 inches, 30" in the ground, marked 1 HES 579 on NW face, X on top
 13" Fir bears S.50°01'W., 35 lks
 14" Pine bears N.3°25'W., 19 lks
 Mound of stones, 4 ft. base, 2 ft. high, NW of corner

EVIDENCE FOUND: 10" x 13" x 8" shale stone marked 1 HES 579 on NW face, X on top
 18" Fir bears S.50°W., 23.1 ft., K-tag
 Mound of stones, 4 ft. base, .5' high, NW of corner

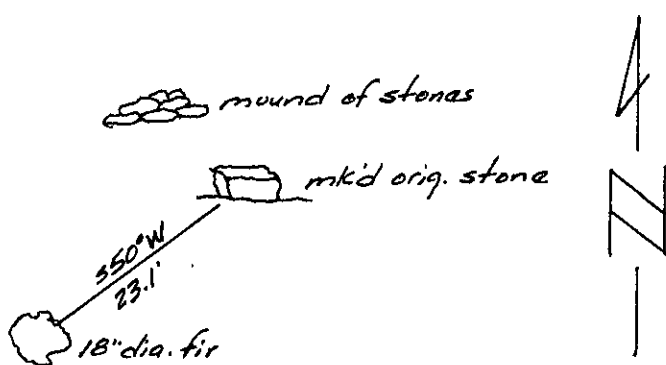

SKETCH OF CORNER

CERTIFICATION

1. _____
 certify the information shown herein is true and correct.

Signature of Registered Party Chief

1. Robert S. [Signature]
 certify that this Corner has been correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" 870-22-101, 200 B.C.R. 10-3.

Signature of Registered Party & Seal

Date: 11/30/82


Employer: Professional Consultants, Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the January 21st day of 1982 was noted on the cross-index plat and is assigned page No. 1500, in book No. 1

Eleanor L. Vaughn by Betty L. Conces
 County Official deputy

Cross Index No. L, M-12, 13 T. 31 N R. 32 W PMM

Sec. 16 - Unsurveyed



• - corner this sheet