Original and/or subset are record used to evaluate the corner position.
Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated

Description of monument and accessories set to perpetuate the corner position.
Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.

Certification must be signed and sealed by Registered Land Surveyor in State of Montana.

6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

.R. _32W Corner __ 1 HES 578 & MC 31N Lincoln _ P.M.M. County

ORIGINAL G.L.O. NOTES: 1916


CORNER: Quartzite stone 26 \times 10 \times 10 inches, 16" in the ground, marked MC on south and

1 HES 578 on N. face and + on top 6" Fir bears S.8°20'E., 12 lks

6" Fir bears S.64°40'W., 23 lks Mound of stones, 4 ft. base, 2 ft. high, 3 1/4 ft. N. of corner USLM No. 578 bears N.32°30'W., 1.95 chains

EVIDENCE FOUND: Quartzite stone $10 \times 10 \times 10$ inches, marked MC on S. and 1 HES 578 on N.

face and + on top 14" Fir bears S.8°E., 8.0 feet, K-tag 10" Fir bears S.65°W., 15.2 feet, K-tag Mound of stones, 4 ft. base, .5' high, N. of corner

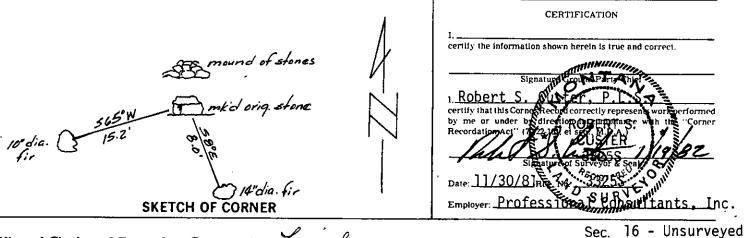

Office of Clerk and Recorder, County of Lincoln $oldsymbol{\bot}$. This ''corner January record" was filed for record on the _ _ day of 19%? was noted on the cross-index plat and is assigned page No. 1502 Eleanor L. Waughn by Betty L. Conces County Official J deputy book No. __

L, M-12,13 _{T.} 31N _{R.} 32W _{PMM}

· - corner this sheet