

INSTRUCTIONS

1. Original and/or sub record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner 5 HES 443 & M.C. T. 31N R. 32W P.M.M. Lincoln County

ORIGINAL U.S.D.A. NOTES: 1916

CORNER: Sandstone 24 x 10 x 6 inches, 14" in ground marked MC on S. face and 5 HES 443 on N. face
 14" Larch bears N.69°30'W., 83 lks
 22" Cottonwood N.15°30'E., 85 lks
 Mound of stone, 4 ft. base, 2 ft. high, N. of corner

EVIDENCE FOUND: Sandstone 10" x 10" x 6", marked MC on S. face, 5 HES 443 on N. face
 24" stump bears N.69°W., 54.8 feet

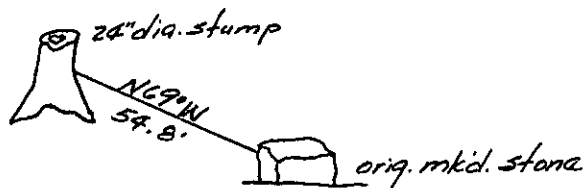

SKETCH OF CORNER

CERTIFICATION

I, _____
 certify the information above is true and correct.

Signature Ground Party Chief
 I, Robert S. Chubb REGISTERED LAND SURVEYOR

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act," 70-1107, 33 Stat. 1234, M.D.A.

Signature of Surveyor
 Date: 11/30/81 Reg. No. 1982


Employer: Professional Consultants, Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the January 21st day of 1982 was noted on the cross-index plat and is assigned page No. 1506, in book No. 1

Eleanor L. Vaughn by Betty L. Conner
 County Official deputy

Cross Index No. L, M-8, 9 T. 31N R. 32W PMM

Sec. 17 - Unsurveyed



• - corner this sheet