

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1 of HES 440 T. 31 N. R. 32 W. P.M.M. Lincoln County

I. 1915 H.E.S. original record by E. R. JOHNSON: Set stone and two bearing trees.

1922 H.E.S. amended survey record by J. F. PFOU: Place a small stone mkd. with a cross (X) under a sandstone 24x12x8 ins. 16 ins. in ground, mkd. CC on S.W. and 1 HES 440 on S.E. face and cross (X) on top for exact cor. point from which:


A cross (x) on a fir, 8 ins. diam., bears $S36^{\circ}00'E$, 26 links dist.

A cross (x) on a fir, 7 ins. diam., bears $S44^{\circ}50'W$, 83 links dist.; each blazed and scribed 1 HES 440 BT.

Raise a mound of earth and stone, 4 ft. base, 2 ft. high, SE of corner.

Note: Cor. 1 as set in 1915 was not used for amended H.E.S. 440.

1970 H.E.S. remonumentation record by S. J. SKOUSEN: Corner destroyed by construction of Lower Quartz Creek Road No. 601. For corner No. 1 and CC of H.E.S. 440, set a 2 in. diam. iron pipe, 24 ins. in the ground, with brass cap mkd. as shown below. I set corner from bearing and distance from original bearing tree.



from which:

A fir snag, 14 ins. diam., bears $S44^{\circ}50'W$, 85 lks. dist., scribing visible.

Establish two new bearing trees:

A pine, 17 ins. diam., bears $N89^{\circ}W$, 46 lks. dist., mkd. RM.

A spruce, 9 ins. diam., bears $N71\frac{1}{2}^{\circ}W$, 58 lks. dist., mkd. RM.

Placed an iron fence post with signs attached alongside the iron pipe.

II. Found iron pipe, 6 ins. above ground, firmly set, with brass cap mkd as shown above, from which:

A pine stump, 17 ins. diam., bears $N89^{\circ}W$, 30.4 ft. dist. (46.0 lks.), mkd. "RM".

A spruce, 13 ins. diam., bears $N7^{\circ}W$, 38.2 ft. dist. (57.8 lks.), healed face.


III. Establish one new bearing tree:

A cedar, 11 ins. diam., bears $N73^{\circ}W$, 28.1 ft. dist., mkd. 1 HES 440 CC BT.

Painted a red band around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, EAST, 3 ft.

Magnetic declination: 20° East

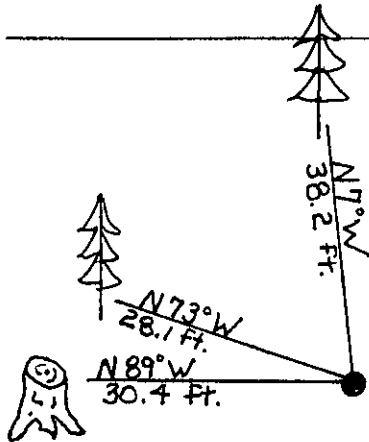

SKETCH OF CORNER

CERTIFICATION

Mark Federman

I, Mark Federman, certify the information shown herein is true and correct.

Signature Ground Party Chief

Alvah F. Hughes


I, Alvah F. Hughes, certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.).

Signature of Surveyor & Seal

Date: 1/3/94 Reg. No. 7322LS

Employer: U.S. FOREST SERVICE

Sec. 24



Office of Clerk and Recorder, County of Lincoln. This "corner

record" was filed for record on March 5, 1994

was noted on the cross-index plat and is assigned page No. 6213, in

book No. _____

Coral M. Cummings
County Official

Cross Index No. 1 HES 440 T. 31N R. 32W P.M.M.

• - corner this sheet