CERTIFIED CORNER RECORDATION

Corner MC Cor. 1 Sec. 16 T. 31N R. 32W P.M., MT Lincoln County HES 578

I. 1916 G.L.O. Original Homestead Entry Survey No. 578 by Fred E. Thieme: Set a quart-zite stone, 26x10x10 ins., 16 ins. in the ground, mkd. "MC" on S., and "1 HES 578" on N. faces, with a cross (x) mkd. on the top for the exact corner point.

Established two bearing trees:

A fir, 6 ins. diam., bears S08°20'E, 12 lks. dist., mkd. "1 HES 578 MC BT". A fir, 6 ins. diam., bears S64°40'W, 23 lks. dist., mkd. "1 HES 578 MC BT".

Raise a mound of stone, 4 ft. base, 2 ft. high, North, 3 1/2 ft. dist. from the set stone.

II. Found a stone, 7x10 ins., protruding 11 ins. above the ground, firmly set, mkd. as described in the original record.


from which:

A fir, 13 ins. diam., bears S08°E, 7.9 ft. dist., with a healed face. (record) A fir, 12 ins. diam., bears S68°W, 14.6 ft. dist., with a healed face. (record-S64°W, 15.2 ft.)

III. Set a 6 ft. galvanized steel guard post, West, on property line, 3.0 ft. dist. from the corner stone.


Painted bearing trees and attached Land Survey Monument and Bearing Tree signs. Attached Land Survey Monument and Property Boundary decals to the post.

Magnetic Declination: 20° East.

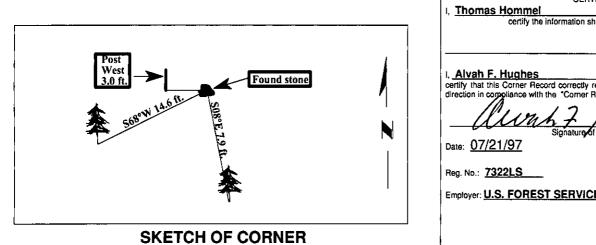

ı, Alvah F. Hughes	MONT
certify that this Corner Record correctly represent direction in compliance with the "Corner Recordat	
awah 7 Se	egtinony
Signature of Surveyor Date: 07/21/97	352 65
Reg. No.: 7322LS	STERED
Employer: U.S. FOREST SERVICE	1 1900 811

Office of Clerk and Recorder, County of _______. This "corner record" was filed for record on ______ was noted on the cross-index plat and is assigned page No. ________920 in book No. ______ CORAL M.CUMMINGS _______ County Official _______.



Cross Index No. MC Cor. 1 ^{T.} 31N ^{R.} 32W ^{P.M., M} HES 578