

CERTIFIED CORNER RECORDATION

Corner Cor. 2 Sec. 16 T. 31N R. 32W P.M., MT Lincoln County
HES 578

- I. 1916 G.L.O. Original Homestead Entry Survey No. 578 by Fred E. Thieme: Set a slate stone, 36x10x7 ins., 26 ins. in the ground, mkd. "2 HES 578" on the S.E. face, with a cross (x) mkd. on the top for the exact corner point.

Established two bearing trees:

A fir, 9 ins. diam., bears S11°45'E, 44 lks. dist., mkd. "2 HES 578 BT".
A fir, 13 ins. diam., bears S62°35'E, 44 lks. dist., mkd. "2 HES 578 BT".

Raise a mound of stone, 4 ft. base, 2 ft. high, S.E. of the corner stone.


- II. Found a stone, 10x5 ins., protruding 14 ins. above the ground, firmly set, mkd. as described in the original record. Found no evidence of the original bearing trees. Found a 6 ft. steel guard post, North, 1.0 ft. dist. from the found stone.

- III. Established two new bearing trees:

A fir, 12 ins. diam., bears N54°E, 18.4 ft. dist., mkd. "2 HES 578 BT".
A fir, 8 ins. diam., bears N10°W, 19.6 ft. dist., mkd. "2 HES 578 BT".

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

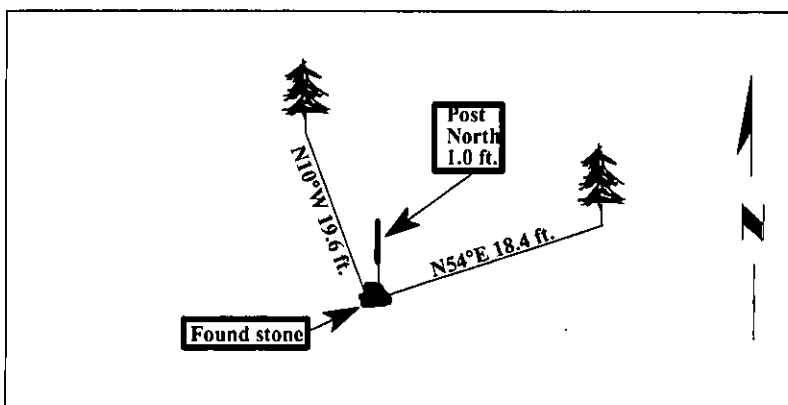

SKETCH OF CORNER

CERTIFICATION

I, Thomas Hommel
certify the information shown herein is true and correct.

I, Alvah F. Hughes
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act", (70-22-101 et seq., M.C.A.)

Alvah F. Hughes
Signature of Surveyor & Seal


Date: 07/21/97

Reg. No.: 7322LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on AUG 21, 1997 was noted on the cross-index plat and is assigned page No. 9921 in book No. CORAL M. CUMMINGS

County Official By ALB



● - corner this sheet

Cross Index No. Cor. 2 T. 31N R. 32W P.M., MT
HES 578