CERTIFIED CORNER RECORDATION

Corner **USLM 578** Sec. 16 31N R. 32W P.M., MT County

I. 1916 G.L.O. Original Homestead Entry Survey No. 578 by Fred E. Thieme: Set a quartzite stone, 16 ins. x 4x2 ft., mkd. "USLM 578" on the S.E. face, with a cross (x) mkd. on the top for the exact corner point.

Established four bearing trees:

A fir, 14 ins. diam., bears S49°30'E, 41 lks. dist., mkd. "USLM 578 BT".

A pine, 9 ins. diam., bears S75°47'W, 39 lks. dist., mkd. "USLM 578 BT".

A fir, 14 ins. diam., bears S32°18'W, 27 lks. dist., mkd. "USLM 578 BT".

A pine, 11 ins. diam., bears N11°55'W, 18 lks. dist., mkd. "USLM 578 BT".

Raise a mound of stone, 6 ft. base, 4 ft. high, West of the corner stone.

II. Found a stone, 4 ft. x 2 ft., protruding 1.5 ft. above the ground, firmly set, mkd. as described in the original record. Found one original bearing tree.

from which:


A pine, 16 ins. diam., bears N12°W, 11.2 ft. dist., with visible scribe.

III. Established one new bearing tree and set one steel guard post:

> A fir, 11 ins. diam., bears N46°E, 46.0 ft. dist., mkd. "USLM 578 BT". A 6 ft. galvanized steel post, N.W., 3.0 ft. dist. of the corner stone.

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs. Attached Land Survey Monument and Property Boundary decals to the post.

Magnetic Declination: 20° East.

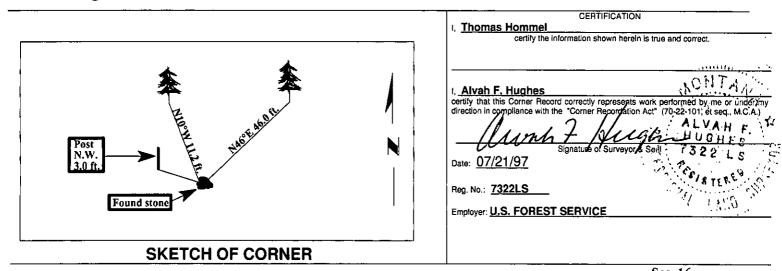

Sec. 16 LINCOLN _. This "corner record" was filed for record Office of Clerk and Recorder, County of ${\sf AUG21,1997}_{\sf was}$ was noted on the cross-index plat and is assigned page No. ${\sf 9922}_{\sf 2}$ in book No.