

CERTIFIED CORNER RECORDATION

Corner **Cor. 14** **Sec. 16** **T. 31N** **R. 32W** **P.M., MT** **Lincoln** **County**
HES 579

I. 1918 G.L.O. Original Homestead Entry Survey No. 579 by Harold Townsend: Set a small stone, mkd. with a cross (x), under a slate stone, 34x14x14 ins., 24 ins. in the ground, mkd. "14 HES 579" on the S.W. face, with a cross (x) mkd. on the top for the exact corner point.

Established two bearing trees:

A fir, 8 ins. diam., bears S41°E, 43 1/2 lks. dist., mkd. "14 HES 579 BT".

A fir, 9 ins. diam., bears N65°44'E, 18 1/2 lks. dist., mkd. "14 HES 579 BT".

Raise a mound of stone, 4 ft. base, 2 ft. high, S.W. of the corner.

II. Found a stone, 9x11 ins., protruding 15 ins. above the ground, firmly set, mkd. "14 HES 579" on the S.W. face, no (x) visible.

from which:


A fir, 14 ins. diam., bears N65°E, 12.2 ft. dist., "H" visible. (record)

A fir, 12 ins. diam., bears S41°E, 29.5 ft. dist., with healed face. (record)

A steel post, North, 1.0 ft. dist from the found stone.

III. Painted bearing trees and attached Land Survey Monument and Bearing Tree signs. Attached Land Survey Monument and Property Boundary decals to the post.

Magnetic Declination: 20° East.

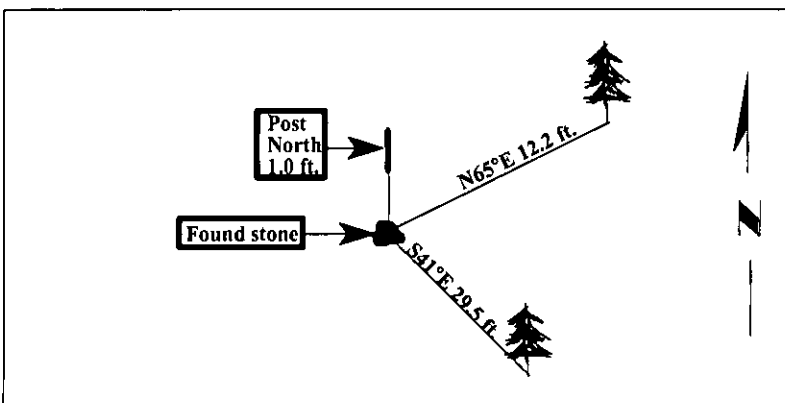


SKETCH OF CORNER

CERTIFICATION I, Thomas Hommel certify the information shown herein is true and correct.
I, Alvah F. Hughes certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act", (70-22, 104, 105, M.C.A.) Signature of Surveyor & Seal
Date: <u>07/21/97</u>
Reg. No.: <u>7322LS</u>
Employer: <u>U.S. FOREST SERVICE</u>

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on AUG 21, 1997 was noted on the cross-index plat and is assigned page No. 9923, in book No. _____

CORAL M. CUMMINGS

County Official *By OLB*



● - corner this sheet

Cross Index No. **Cor. 14** **T. 31N** **R. 32W** **P.M., MT**
HES 579