


-CERTIFIED CORNER RECORDATION

Corner	Sec. Cor	Sec.	8,9,16,17	T.	31N	R.	33W	P.M., MT	Lincoln	County
--------	----------	------	-----------	----	-----	----	-----	----------	---------	--------

I. 1893 G.L.O. Original Record by Daniel P. Mumbrue: Set a wooden post, 4.0 ft. long, 4.0 ins. square, 24 ins. in the ground, for cor. to secs. 8,9,16 and 17, mkd. "T31N S9" on NE, "R33W S16" on SE, "S17" on SW and "S8" on NW faces, with 4 notches on S. and E. edges. Established four bearing trees.

1967 B.L.M. Remonumentation by Woodrow E. Damm et. al.: The cor. of secs. 8,9,16 and 17, monu-mented with a post, 4.0 ft. long, 4.0 ins. square, and witnessed by the remains of the original bearing trees. At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown.

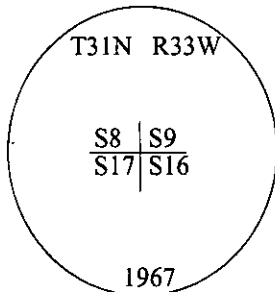

Bury the original post alongside the iron post and establish four new bearing trees.

1994 Certified Corner Recordation, page no. 7307, by Alvah F. Hughes, No. 7322LS: Found a 2 1/2 in. diam. iron pipe, protruding 4 ins. above the ground, firmly set, with B.L.M. brass cap, mkd. as shown and witnessed by the remains of three G.L.O. bearing trees and the B.L.M. bearing trees.

II. Found a 1967 B.L.M. brass cap, protruding 4 ins. above the ground, firmly set, mkd. as shown and wit-nessed by three G.L.O. bearing trees and the B.L.M. bearing trees.
from which:


- A down fir, 9 ins. diam., bears N72°E, 7.5 ft. dist., with a pitched face. (BLM-record)
- A fir, 8 ins. diam., bears S33°E, 20.5 ft. dist., with a pitched face. (BLM-record)
- A fir snag, bears S42°E, 85.0 ft. dist., with visible scribe. (GLO-record-115 lks.-75.9 ft.)
- A larch, 9 ins. diam., bears S41°W, 12.8 ft. dist., with a healed face. (BLM-record)
- A larch snag, 23 ins. diam., bears S57°W, 73.4 ft. dist., with visible scribe. (GLO-record)
- A fir stump, bears N32°W 50.0 ft. dist., with visible face. (GLO-record)
- A fir, 9 ins. diam., bears N49°W, 19.9 ft. dist., with a healed face. (BLM-record)

III. Established one new bearing tree:

- A fir, 10 ins. diam., bears N71°E, 9.0 ft. dist., mkd. "T31N R33W S9 BT".

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East

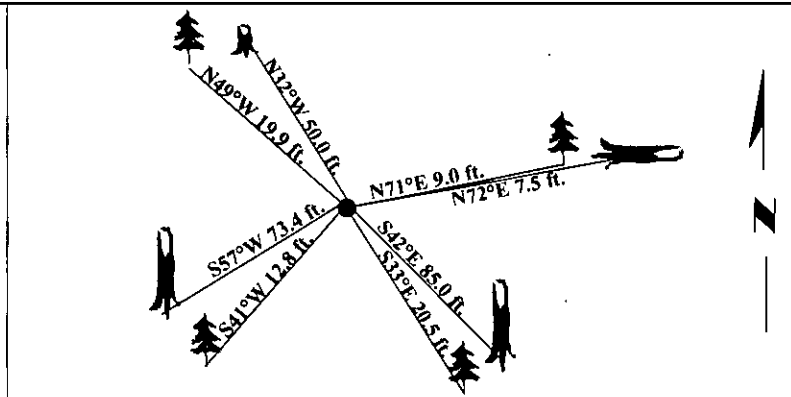

SKETCH OF CORNER

CERTIFICATION	
I, <u>Mark Federman</u>	
certify the information shown herein is true and correct.	
I, <u>Alvah F. Hughes</u>	
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act," (70-22-101 et seq., M.C.A.)	
Date: <u>8/06/98</u>	Signature of Surveyor & Seal
Reg. No.: <u>7322LS</u>	
Employer: <u>U.S. FOREST SERVICE</u>	

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 11-18-98 and was noted on the cross-index plat and is assigned page No. 10257, in book No. .
Coral M. Cumming by Deb
County Official

