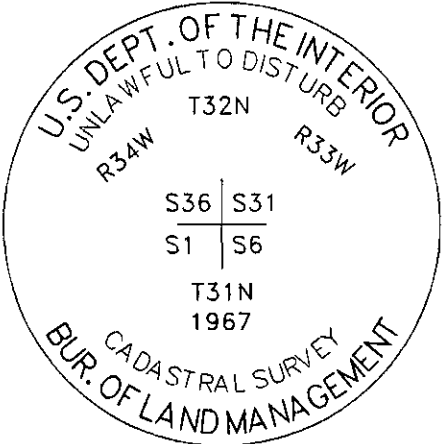


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

### CERTIFIED CORNER RECORDATION

Corner: Sec. Corner, Sections 1, 6, 31 & 36 T. 31, 32N. R. 33, 34W. P.M.M. Lincoln County

- 1893 GLO Record: Set post and established 4 bearing trees.
- 1910 Record: (Lyman) Reset post.
- 1968 Record: (Dammn) Found iron bar & the remains of 1 original bearing tree. Set iron post with brass cap. Buried original iron bar alongside. Established 3 new bearing trees.
- 1983 Record: (Hill 5612S) 1967 BLM Record: From original found evidence, set 2-1/2 ins. dia. iron post. Established 3 new bearing trees. Found 2-1/2 ins. dia. iron post, 4 ins. out of the ground, with brass cap. From which:  
 Larch, 21 ins. dia., bears S33°W, 7.8 ft, w/ healed face  
 Douglas Fir, 11 ins, dia., bears N24°W, 22.4 ft., w/ healed face  
 Douglas Fir, 11 ins, dia., bears N20°E, 22.7 ft., w/ healed face  
 Douglas Fir, 10 ins, dia., bears S49°E, 23.3 ft., w/ healed face
- 1993 Record: (Hughes 7322LS) Found 2-1/2 ins. dia. iron pipe, 3 ins. above the ground, firmly set with a 3-1/4 ins. dia. BLM brass cap. From which:  
 Larch, 14 ins. dia., bears N20°30'E, 57.6 ft., w/ healed face  
 Pine, 8 ins. dia., bears S34°E, 56.1 ft., w/ healed face  
 Larch, 14 ins. dia., bears S67°30'W, 57.2 ft., w/ healed face
- 2010 Found: We find a 3-1/4 ins. dia. brass cap, as shown below, on 2-1/2" dia. pipe, rising 0.5 ft. from a mound of stone. From which:  
 Douglas Fir, 14 ins. dia., bears N20°E, 22.4 ft., w/ overgrown blaze & BT tags  
 Douglas Fir, 11 ins. dia., bears S54°E, 23.1 ft., w/ overgrown blaze & BT tags  
 Larch, 20 ins. dia., bears S30°W, 7.3 ft., w/ overgrown blaze & BT tags  
 Douglas Fir, 12 ins. dia., bears N25°30'W, 22.4 ft., w/ overgrown blaze & BT tags  
 Fence post, bears North, 2.2 ft. -  
 NOTE: Found bearing and distances to reference monuments do not match record.
- 2010 Perpetuation: We establish no new reference monuments. Bearing trees were affixed with BT tags and a painted red band.

 <p><b>SKETCH OF CORNER</b></p>	<p style="text-align: center;"><b>CERTIFICATION</b></p> <p>I, <u>Keith Brandt</u>        certify the information shown herein is true and correct.  <i>Keith Brandt</i>        Signature Ground Party Chief</p> <hr/> <p>I, <u>Ken E Jenkins</u>        certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq.)  <i>Ken E Jenkins</i>        Signature of Surveyor &amp; Seal</p> <p>Date: <u>10/2010</u> Reg. No. <u>9330 LS</u>        Employer: <u>Montana Northwest Company</u>  <u>PO Box 8777, Missoula, MT 59807</u>  <u>406-721-4033 Project No. 1617-10</u></p>
--	---

Office of Clerk and Recorder, County of \_\_\_\_\_ This "corner record" was filed for record on \_\_\_\_\_ STATE OF MONTANA LINCOLN COUNTY  
 RECORDED: 03/30/2011 11:00 KOI: CC&R'S  
 was noted on the cross-index book No. \_\_\_\_\_ BY: *Tammy D. Lauer* CLERK AND RECORDER  
 FEE: \$0.00 TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

