

CERTIFIED CORNER RECORDATION

CORNER C-N-N 1/64 T. 31 N., R. 33 W., P.M.M. LINCOLN COUNTY

RECORD:

NONE

FOUND EVIDENCE:

5/8 Inch dia. rebar capped Mitchell in vicinity

PERPETUATION:


Set a 5/8 inch dia. rebar 30 inches long 36 inches in the ground with a 11/4 inch yellow plastic cap stamped K.E.D. 4975-S (see diagram below)
From which:

A 17.5 inch DBH Spruce scribed C-N-N 1/64 S32 BT bears N22°W 9.8 ft dist.

A 11 inch DBH Cedar scribed X BT bears N63°E 18.8 ft dist.

Painted 6 inch wide bands and attached bearing tree tags to both trees.

MAGNETIC DECLINATION: 18° E

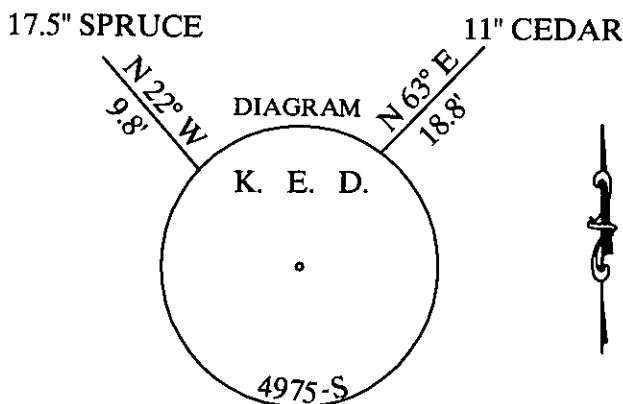


CERTIFICATION
I, George Clark
Certify the information shown herein is true and correct
Signature of Ground Party Chief
I, George Clark
certify that this Corner Record correctly represents work
performed by me or under my direction in compliance with the
"Corner Recordation act"
(70-22-01, et seq., M.C.A.)
Signature of Surveyor & Seal 4975-S
Date 7/15 Reg. No. 4975-S
Employer: DAVIS SURVEYING INC

SKETCH OF CORNER

Office of Clerk and Recorder, County of _____

This "corner record" 219615 BOOK: CCR CC&R'S PAGE: 11301 Pages: 1
was noted on the cl STATE OF MONTANA LINCOLN COUNTY
No. _____ RECORDED: 06/18/2009 11:55 KOI: CC&R'S
In book No. _____ TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: Heanni Lauer
TO: DAVIS SURVEYING, INC. P.O. BOX 896, TROY, MONTANA 59935

SECTION



Cross Index No. C-N-N 1/64 T. 31 N., R. 33 W., P.M.M.

THIS CORNER