

CERTIFIED CORNER RECONSTRUCTION

CORNER T. 31 N., R. 33 W., P.M.M LINCLON COUNTY

RECORD:

U.S. Highway No. 2 Project # F1-1 (21)14 station 215+00

FOUND EVIDENCE:

A 2 inch dia. Alum. Cap Stamped M.D.O.H. station 215+00

PERPETUATION:


Established one new bearing tree and one new bearing object for found monument
From Which

A 15 inch DBH Douglas Fir scribed X BT bears N68°W 9.7 ft. dist.

A 6 foot long steel post bears S13°W 5.05 ft. dist.

Painted 6 inch wide band on tree and attached bearing tree signs to tree and post.

MAGNETIC DECLINATION: 18° E

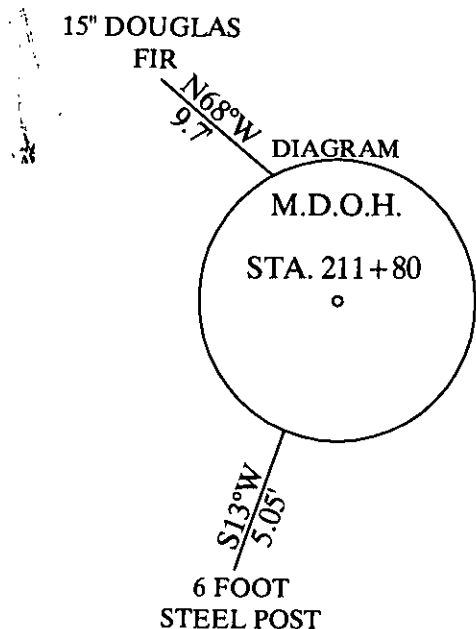

CERTIFICATION

I, George Clark
 Certify the information shown herein is true and correct
 Signature of Ground Party Chief

I, Kenneth E. Lauer
 certify that this Corner Record correctly represents work
 performed by me or under my direction in compliance with the
 "Corner Recordation Act"
 (70-22101 et seq., M.C.A.)

KENNETH E. LAUER
 Signature of Surveyor & Seal
 Date: 6-23-2010 9975-S
 Employee No. 22488
 Employer: Davis Surveying Inc

SKETCH OF CORNER

Office of Clerk and Recorder, County of _____

This "corner record" was noted on the No. _____ In book No. _____

226697 BOOK: CCR CC&R'S PAGE: 11511 Pages: 1

STATE OF MONTANA LINCOLN COUNTY
 RECORDED: 06/23/2010 2:31 KOI: CC&R'S
 TAMMY D. LAUER CLERK AND RECORDER
 FEE: \$0.00 BY: Heansie Davis
 TO: DAVIS SURVEYING, INC. P.O. BOX 896, TROY, MONTANA 59935

SECTION

	18		

Cross Index No. T. 31 N., R. 33 W., P.M.M.

THIS CORNER