

CERTIFIED CORNER RECORDATION

CORNER _____ T. 31 N., R. 33 W., P.M.M. _____ LINCOLN COUNTY

RECORD:

NONE

FOUND EVIDENCE:

NONE

PERPETUATION:


Set a 5/8 inch dia. rebar with a 1 1/4 inch yellow plastic cap stamped K.ED. 4975-S
From Which

A 6 foot long steel post bears S15°E 27.4 ft. dist.

A 6 foot long steel post bears S33°W 28.8 ft. dist.

Attached bearing tree signs to post.

MAGNETIC DECLINATION: 18° E

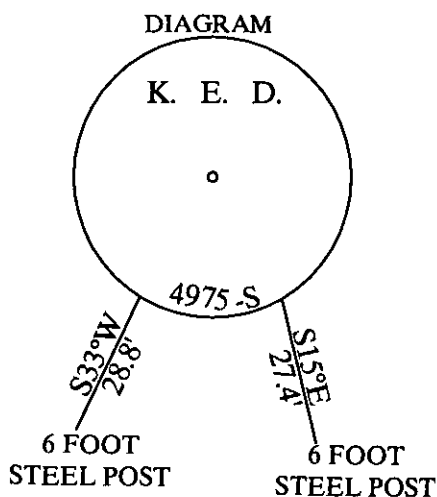

CERTIFICATION

I, George Clark
Certify the information shown herein is true and correct
Signature of Ground Party Chief

I, Kenneth E. Davis
certify that this Corner Record correctly represents work
performed by me or under my direction in compliance with the
"Corner Recordation Act"
(70-222-01, et seq., M.C.A.)

Kenneth E. Davis
Signature of Surveyor & Seal
Date: 6/23/2010 4975-S
Employer: Davis Surveying Inc

SKETCH OF CORNER

Office of Clerk and Recorder, County of _____

This "corner record" was filed for record on _____

was noted on 226701 BOOK: CCR CC&R'S PAGE: 11515 Pages: 1

No. _____ STATE OF MONTANA LINCOLN COUNTY

In book No. _____ RECORDED: 06/23/2010 2:34 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER


FEE: \$0.00

BY

TO: DAVIS SURVEYING, INC. P.O. BOX 896, TROY, MONTANA 59935

Cross Index No. _____ T. 31 N., R. 33 W., P.M.M.

SECTION



THIS CORNER