CERTIFIED CORNER RECORDATION

CORNER _____ T. 31 N., R. 33 W., P.M.M LINCLON COUNTY

RECORD:

NONE

FOUND EVIDENCE:

NONE

PERPETUATION:

Set a 5/8 inch dia. rebar with a 11/4 inch yellow plastic cap stamped K.ED. 4975-S
From Which

A 6 foot long steel post bears N60°W 3.80 ft. dist.

A 6 foot long steel post bears S30°W 4.20 ft. dist.

Attached bearing tree signs to post.

MAGNETIC DECLINATION: 18° E

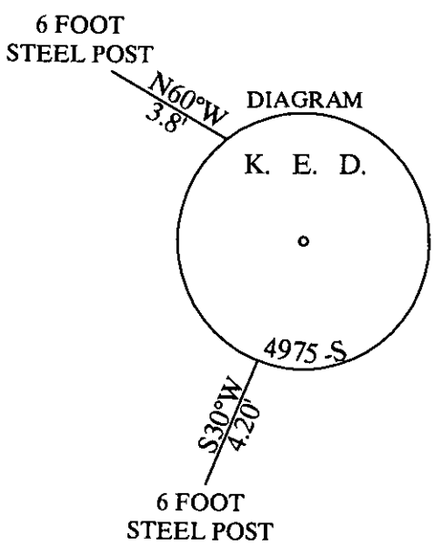

CERTIFICATION

I, George Clark

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I, [illegible]

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation act" (§70-22-101, et seq., M.C.A.)

KENNETH E. DAVIS 4975-S LAND SURVEYOR

Signature of Surveyor & Seal

Date: [illegible] Reg. No. 4975-S

Firm over: Davis Surveying Inc

SKETCH OF CORNER

Office of Clerk and Recorder, County of _____

This "corner record" was filed for record on _____

was noted

No._____

In book No

226702 BOOK: CCR CC&R'S PAGE: 11516 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 06/23/2010 2:35 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: $0.00 BY: [illegible] Deputy
TO: DAVIS SURVEYING, INC. P.O. BOX 896, TROY, MONTANA 59935

SECTION



THIS CORNER

Cross Index No._____ T. 31 N., R. 33W., P.M.M.