

CERTIFIED CORNER RECOMODATION

CORNER _____ T. 31 N., R. 33 W., P.M.M. _____ LINCLON COUNTY

RECORD:

NONE

FOUND EVIDENCE:

NONE

PERPETUATION:


Set a 5/8 inch dia. rebar with a yellow plastic cap stamped K.E.D. 4975-S
From Which

A 7.5 inch DBH Douglas Fir scribed X BT bears N28°E 6.1 ft. dist.

A 7 inch DBH Douglas Fir scribed X BT bears S14°E 4.0 ft. dist.

Painted 6 inch wide band and attached bearing tree signs to tree.

MAGNETIC DECLINATION: 18° E

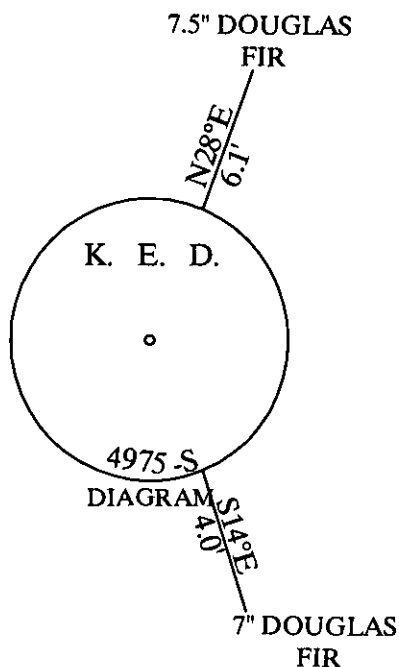

CERTIFICATION

I, George Clark
Certify the information shown herein is true and correct
Signature of Ground Party Chief

I, Kenneth E. Davis
certify that this Corner Record correctly represents work
performed by me or under my direction in compliance with the
"Corner Recordation Act"
(70-22-01 et seq., M.C.A.)

Kenneth E. Davis
Signature of Surveyor & Seal
Date: 12/3/10 RS. No. 4975-S
Employed by: Davis Surveying, Inc.

SKETCH OF CORNER

Office of Clerk and Recorder, County of _____

This "corner record" was filed for record on _____

was noted (226703 BOOK: CCR CC&R'S PAGE: 11517 Pages: 1

No. _____ STATE OF MONTANA LINCOLN COUNTY

In book No. _____ RECORDED: 06/23/2010 2:36 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER


FEE: \$0.00

BY: Kenneth E. Davis

TO: DAVIS SURVEYING, INC. P.O. BOX 896, TROY, MONTANA 59935

Cross Index No. _____ T. 31 N., R. 33W., P.M.M.

SECTION



THIS CORNER