CERTIFIED CORNER RECORD TION

E1/4 TWP. 31 N., R. 33 W., P.M.M. LINCOLN COUNTY, MONTANA

RECORD:

NONE

FOUND EVIDENCE:

NONE

PERPETUATION:

Set a 3 1/4 inches diameter aluminum cap stamped (See diagram below) attached to a 2 1/2 inch diameter pipe 30 inches long 28 inches in the ground. From which:


A 10 inch DBH Douglas Fir scribed S26 1/4 BT which bears S40°E 26.8 ft. dist.

A 11 inch DBH Douglas Fir scribed S27 1/4 BT which bears S12°W 19.75 ft. dist.

Painted six inch wide bands and attached warning and Bearing Tree signs to both trees

MAGNETIC DECLINATION: 15° E

SKETCH OF CORNER

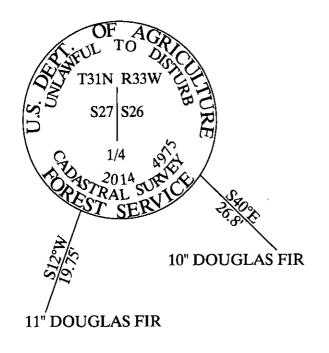

CERTIFICATION

I, Matt Mischenko, certify the information herein is true Signature of Ground Party Chief

I, Kenneth E. Davis certify that this Corner Record correctly represents work performed by Me or under my direction in compliance with the "Corner Recordation Act". ., M.C.A.)

E.I.D. L.L.C

4975-S

SECTION

Office of Clerk and Recorder, County of_

This "corner rec

251862 BOOK: CCR CCGR'S

PAGE: 12121 Pages: 1

page No.

in book No._

was noted on th STATE OF MONTANA LINCOLN COUNTY

_ RECORDED: 06/18/2014 10:05 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00

THIS CORNER

CROSS INDEX NO. TWP. 31 N., R. 33 W., P.M.M. E1/4